



The Mote Revolution:

Low Power Wireless Sensor Network Devices

University of California, Berkeley

Joseph Polastre
Robert Szewczyk
Cory Sharp
David Culler

**“The Mote Revolution: Low Power
Wireless Sensor Network Devices”
Hot Chips 2004 : Aug 22-24, 2004**

**Only a relevant
subset of slides**



Outline

- Trends and Applications
- Mote History and Evolution
- Design Principles
- Telos





Faster, Smaller, Numerous

■ Moore's Law

- "Stuff" (transistors, etc) doubling every 1-2 years

■ Bell's Law

- New computing class every 10 years

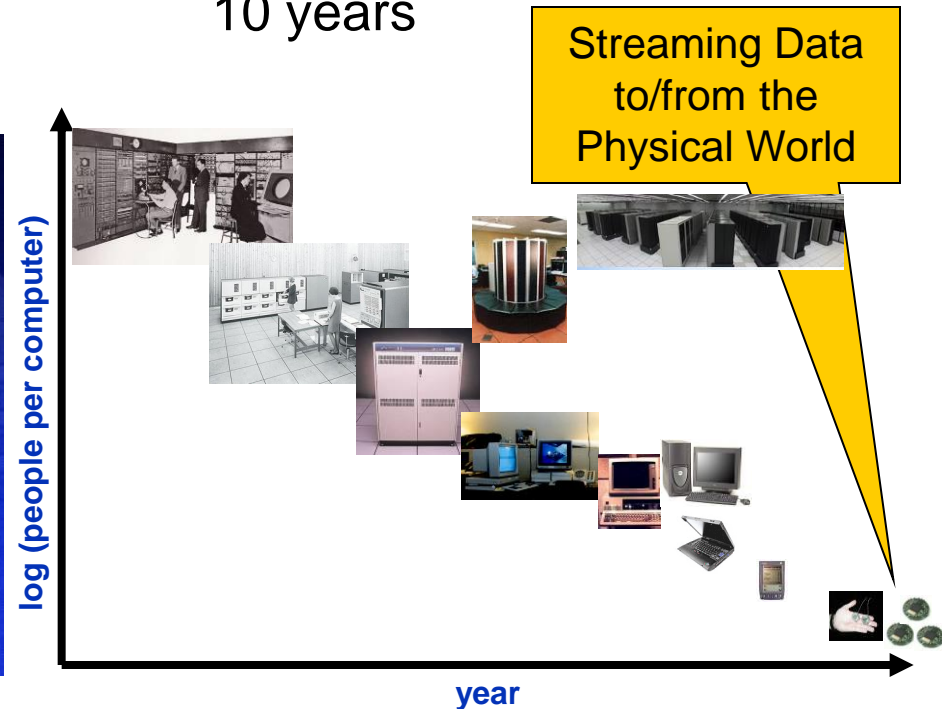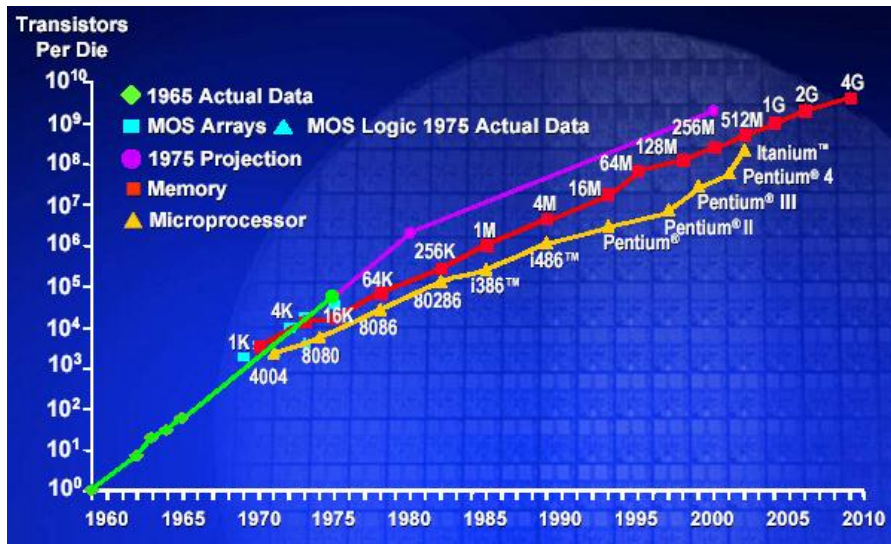

"The Mote Revolution: Low Power Wireless Sensor Network Devices"
Hot Chips 2004 : Aug 22-24, 2004

Applications



Density & Scale
Sample Rate & Precision
Disconnection & Lifetime
Mobility
Low Latency

■ Environmental Monitoring

- Habitat Monitoring
- Integrated Biology
- Structural Monitoring

■ Interactive and Control


- Pursuer-Evader
- Intrusion Detection
- Automation

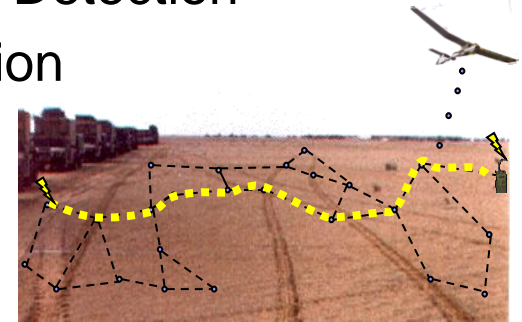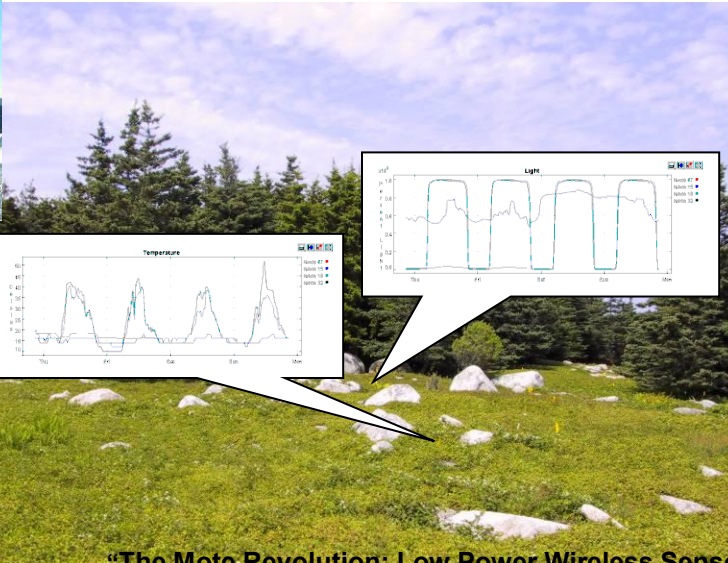

"The Mote Revolution: Low Power Wireless Sensor Network Devices"




Open Experimental Platform

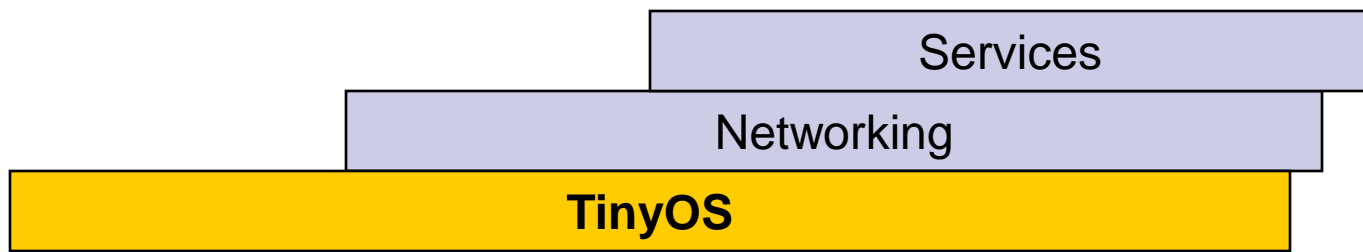

Telos 4/04
 Robust
 Low Power
 250kbps
 Easy to use

WeC 99
 "Smart Rock"



Small microcontroller
 8 kB code
 512 B data
 Simple, low-power radio
 10 kbps ASK
 EEPROM (32 KB)
 Simple sensors

Rene 11/00




Designed for experimentation
 -sensor boards
 -power boards

Dot 9/01



Demonstrate scale

Mica 1/02

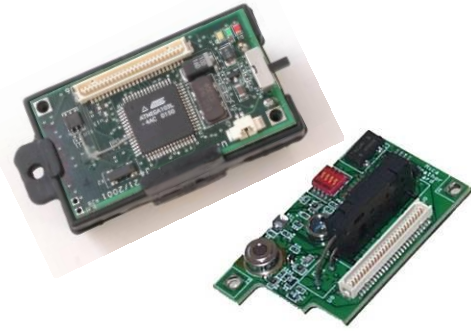


NEST open exp. Platform
 128 kB code, 4 kB data
 40kbps OOK/ASK radio
 512 kB Flash



Mica2 12/02
 38.4kbps radio
 FSK









Spec 6/03
 "Mote on a chip"



Commercial Off The Shelf Components (COTS)
 "The Mote Revolution: Low Power Wireless Sensor Network Devices"
 Hot Chips 2004 : Aug 22-24, 2004

Mote Evolution



Mote Type Year	<i>WeC</i> 1998	<i>René</i> 1999	<i>René 2</i> 2000	<i>Dot</i> 2000	<i>Mica</i> 2001	<i>Mica2Dot</i> 2002	<i>Mica 2</i> 2002	<i>Telos</i> 2004
								

Microcontroller	AT90LS8535		ATmega163		ATmega128		TI MSP430	
Type	AT90LS8535		ATmega163		ATmega128		TI MSP430	
Program memory (KB)	8		16		128		60	
RAM (KB)	0.5		1		4		2	
Active Power (mW)	15		15		8		33	
Sleep Power (μ W)	45		45		75		75	
Wakeup Time (μ s)	1000		36		180		180	

Nonvolatile storage	24LC256		AT45DB041B		ST M24M01S	
Chip	24LC256		AT45DB041B		ST M24M01S	
Connection type	I ² C		SPI		I ² C	
Size (KB)	32		512		128	

Communication	TR1000		TR1000		CC1000		CC2420	
Radio	TR1000		TR1000		CC1000		CC2420	
Data rate (kbps)	10		40		38.4		250	
Modulation type	OOK		ASK		FSK		O-QPSK	
Receive Power (mW)	9		12		29		38	
Transmit Power at 0dBm (mW)	36		36		42		35	


Power Consumption	2.7		2.7		2.7		1.8	
Minimum Operation (V)	2.7		2.7		2.7		1.8	
Total Active Power (mW)	24		27		44		89	

Programming and Sensor Interface	none	51-pin	51-pin	none	51-pin	19-pin	51-pin	10-pin	
Expansion	none	51-pin	51-pin	none	51-pin	19-pin	51-pin	10-pin	
Communication	IEEE 1284 (programming) and RS232 (requires additional hardware)							USB	
Integrated Sensors	no	no	no	yes	no	no	no	yes	

"The Mote Revolution: Low Power Wireless Sensor Network Devices"



Mote

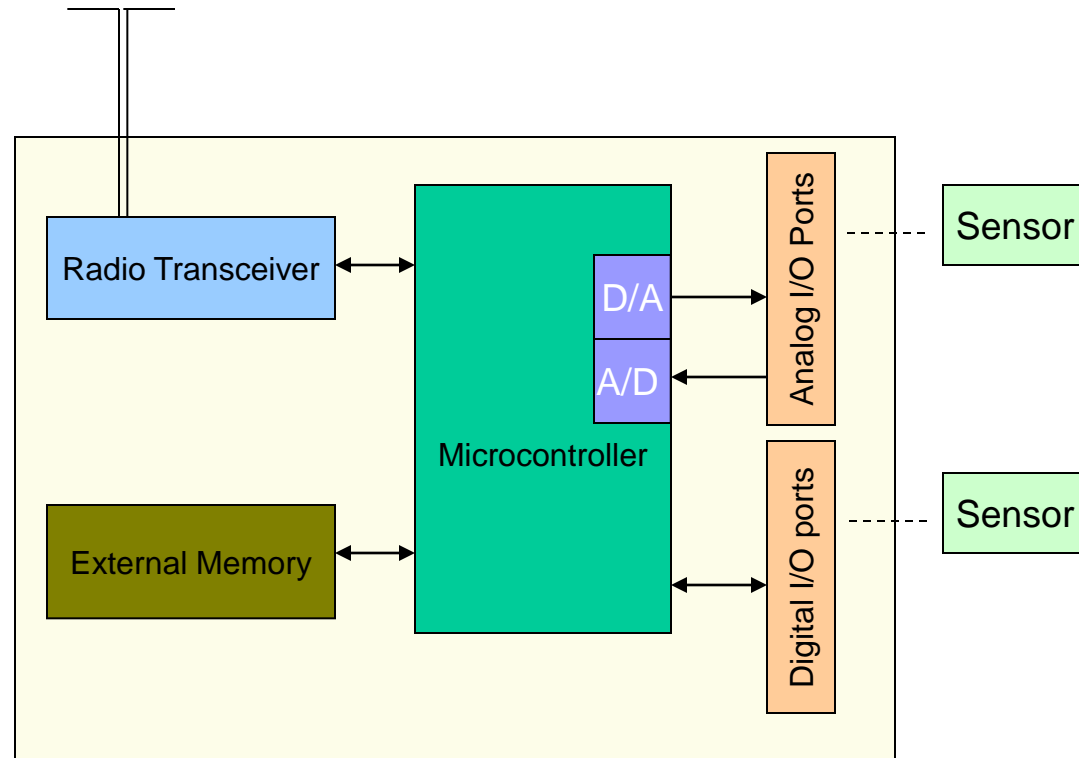

- A very low cost low power computer
- Monitors one or more sensors
- A Radio Link to the outside world
- Are the building blocks of Wireless Sensor Networks (WSN)

Nuwan Gajaweera
Presentation




Low Power Operation

- Efficient Hardware
 - Integration and Isolation
 - Complementary functionality (DMA, USART, etc)
 - Selectable Power States (Off, Sleep, Standby)
 - Operate at low voltages and low current
 - Run to cut-off voltage of power source
- Efficient Software
 - Fine grained control of hardware
 - Utilize wireless broadcast medium
 - Aggregate



Typical WSN Application

- Periodic
 - Data Collection
 - Network Maintenance
 - *Majority of operation*
- Triggered Events
 - Detection/Notification
 - *Infrequently occurs*
 - *But... must be reported quickly and reliably*
- Long Lifetime
 - Months to Years without changing batteries
 - Power management is the key to WSN success

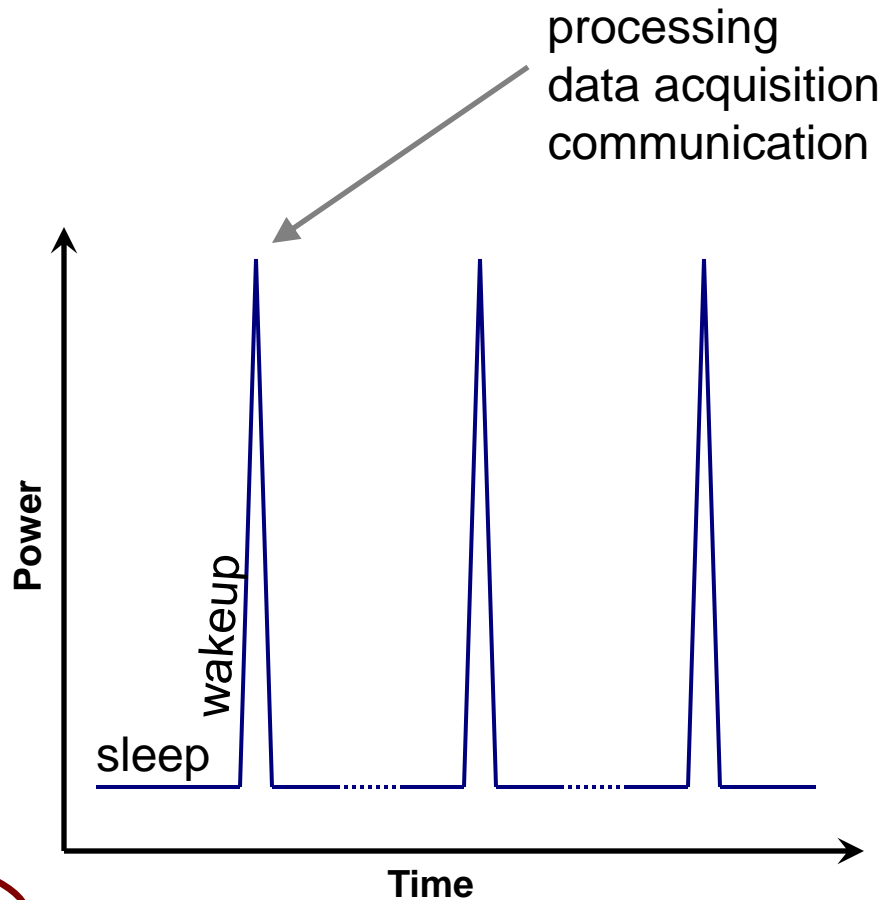



Design Principles

- Key to Low **Duty Cycle** Operation:
 - Sleep – majority of the time
 - Wakeup – quickly start processing
 - Active – minimize work & return to sleep




Sleep

- Majority of time, node is asleep
 - >99%
- Minimize sleep current through
 - Isolating and shutting down individual circuits
 - Using low power hardware
 - Need RAM retention
- Run auxiliary hardware components from low speed oscillators (typically 32kHz)
 - Perform ADC conversions, DMA transfers, and bus operations while microcontroller core is stopped



Telos Platform

- A new platform for low power research
 - Monitoring applications:
 - Environmental
 - Building
 - Tracking
- Long lifetime, low power, low cost
- Built from application experiences and low duty cycle design principles
- Robustness
 - Integrated antenna
 - Integrated sensors
 - Soldered connections
- Standards Based
 - IEEE 802.15.4
 - USB
- IEEE 802.15.4 **ZigBee**
 - CC2420 radio
 - **Frame-based**
 - 250kbps
 - 2.4GHz ISM band
- TI MSP430
 - Ultra low power
 - 1.6 μ A sleep
 - 460 μ A active
 - 1.8V operation

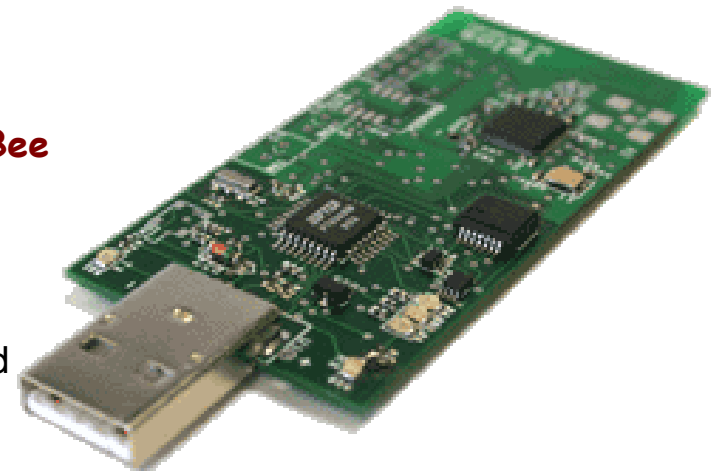

Open embedded platform with open source tools, operating system (TinyOS), and designs.



Minimize Power Consumption

- Compare to MicaZ: a Mica2 mote with AVR mcu and 802.15.4 radio
- Sleep
 - Majority of the time
 - Telos: $2.4\mu\text{A}$
 - MicaZ: $30\mu\text{A}$
- Wakeup
 - As quickly as possible to process and return to sleep
 - Telos: 290ns typical, $6\mu\text{s}$ max
 - MicaZ: $60\mu\text{s}$ max internal oscillator, 4ms external
- Active
 - Get your work done and get back to sleep
 - Telos: 4-8MHz 16-bit
 - MicaZ: 8MHz 8-bit


CC2420 Radio

IEEE 802.15.4 Compliant



■ CC2420

- Fast data rate, robust signal
 - 250kbps : 2Mchip/s : DSSS
 - 2.4GHz : Offset QPSK : 5MHz
 - 16 channels in 802.15.4
 - -94dBm sensitivity
- Low Voltage Operation
 - 1.8V minimum supply
- Software Assistance for Low Power Microcontrollers
 - 128byte TX/RX buffers for full packet support
 - Automatic address decoding and automatic acknowledgements
 - Hardware encryption/authentication
 - Link quality indicator (assist software link estimation)
 - samples error rate of first 8 chips of packet (8 chips/bit)

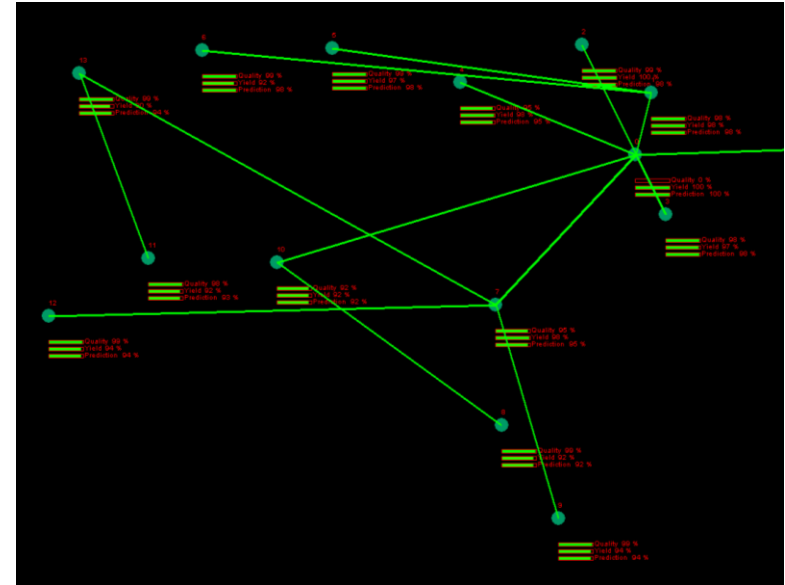



Power Calculation Comparison

Design for low power

■ Mica2 (AVR)

- 0.2 ms wakeup
- 30 μ W sleep
- 33 mW active
- 21 mW radio
- 19 kbps
- 2.5V min
 - 2/3 of AA capacity

■ MicaZ (AVR)

- 0.2 ms wakeup
- 30 μ W sleep
- 33 mW active
- 45 mW radio
- 250 kbps
- 2.5V min
 - 2/3 of AA capacity

■ Telos (TI MSP)

- 0.006 ms wakeup
- 2 μ W sleep
- 3 mW active
- 45 mW radio
- 250 kbps
- 1.8V min
 - 8/8 of AA capacity

Supporting mesh networking with a pair of AA batteries reporting data once every 3 minutes using synchronization (<1% duty cycle)

453 days

328 days

945 days




Sensors

■ Integrated Sensors

- Sensirion SHT11
 - Humidity (3.5%)
 - Temperature (0.5°C)
 - Digital sensor
- Hamamatsu S1087
 - Photosynthetically active light
 - Silicon diode
- Hamamatsu S1337-BQ
 - Total solar light
 - Silicon diode

■ Expansion

- 6 ADC channels
- 4 digital I/O
- Existing sensor boards
 - Magnetometer
 - Ultrasound
 - Accelerometer
 - 4 PIR sensors
 - Microphone
 - Buzzer

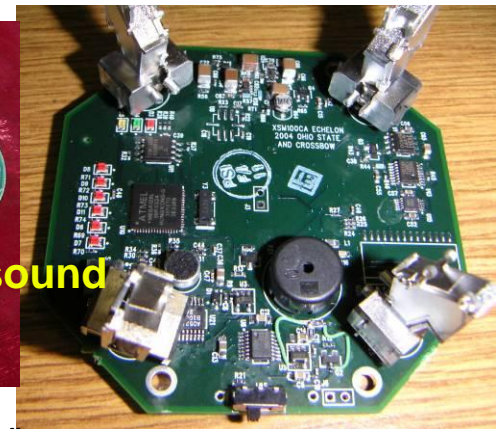

“The Mote Revolution: Low Power Wireless Sensor Network Devices”
Hot Chips 2004 : Aug 22-24, 2004