

Core-Stateless Fair Queueing: A Scalable Architecture to Approximate Fair Bandwidth Allocations in High Speed Networks

Ion Stoica, Scott Shenker, and Hui Zhang
SIGCOMM'98, Vancouver, August 1998
subsequently
IEEE/ACM Transactions on Networking
11(1), 2003, pp. 33-46.

Presented by Bob Kinicki

Outline

- **Introduction**
- Core-Stateless Fair Queueing (CSFQ)
 - Fluid Model Algorithm
 - Packet Algorithm
 - Flow Arrival Rate
 - Link Fair Share Rate Estimation
- NS Simulations
- Conclusions




Introduction

- This paper brings forward the concept of “fair” allocation.
- The claim is that fair allocation inherently requires routers to maintain **state** and perform operations on a per flow basis.
- The authors present an architecture and a set of algorithms that is “approximately” fair while using FIFO queueing at internal routers.



An "Island" of Routers

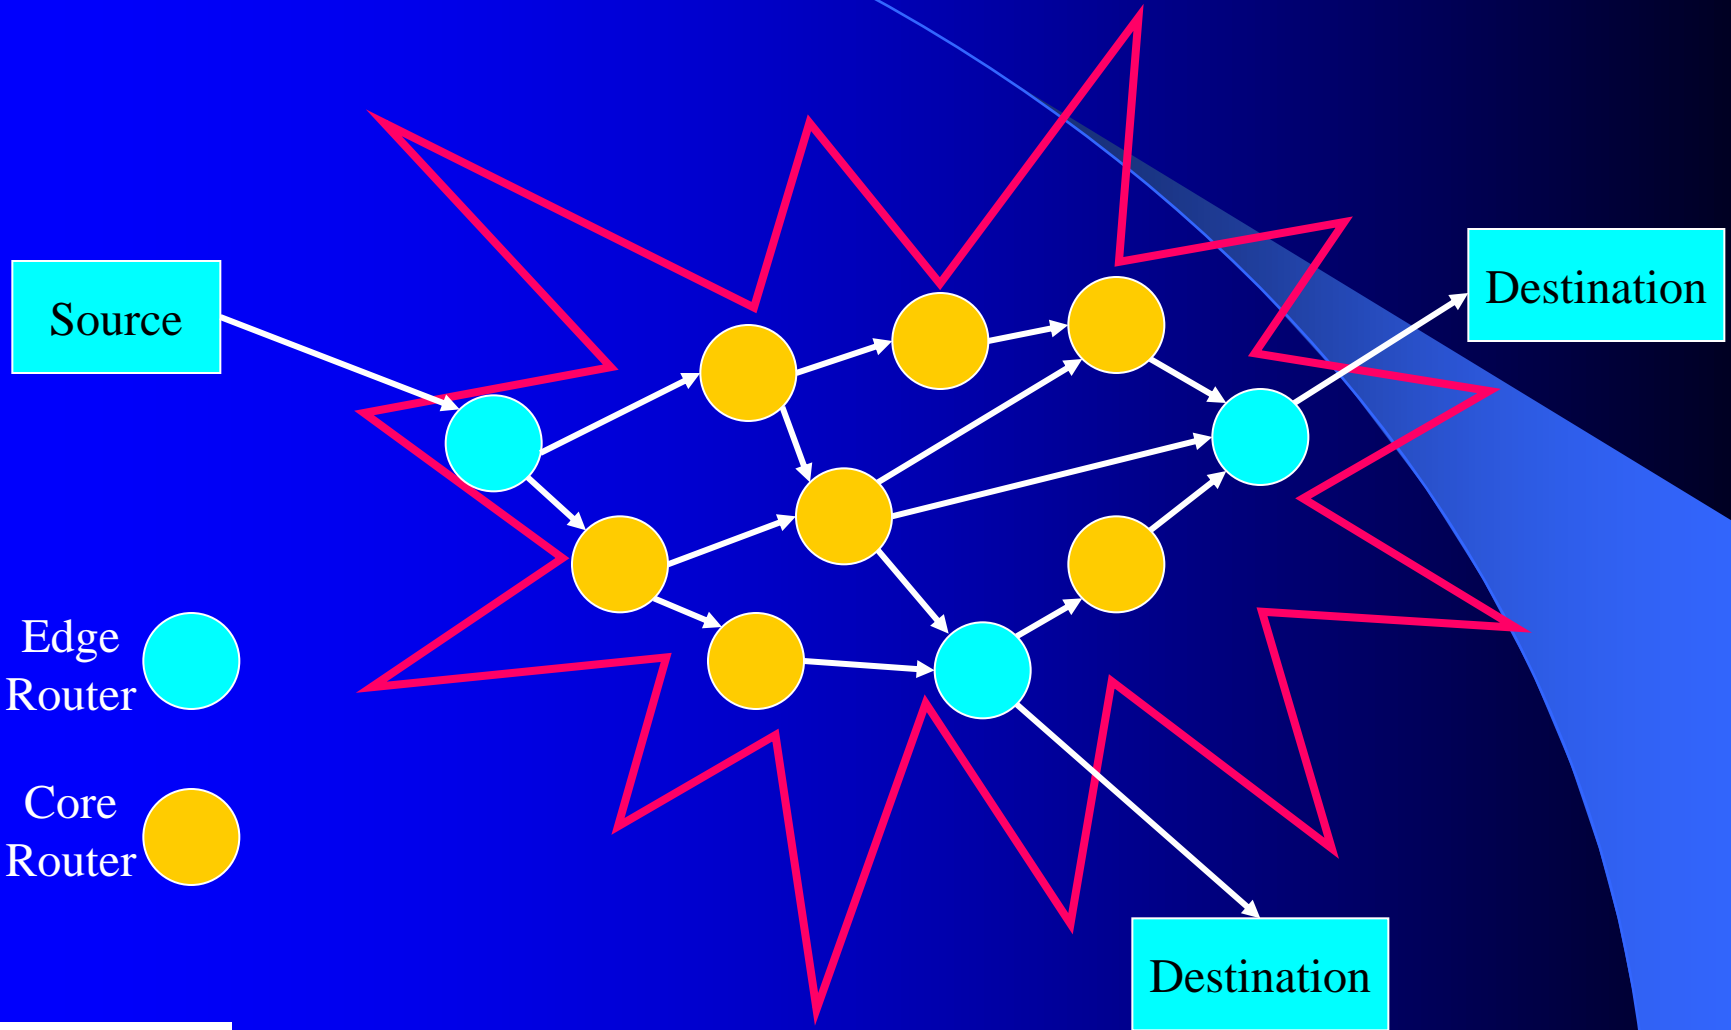

Outline

- Introduction
- **Core-Stateless Fair Queueing (CSFQ)**
 - Fluid Model Algorithm
 - Packet Algorithm
 - Flow Arrival Rate
 - Link Fair Share Rate Estimation
- NS Simulations
- Conclusions



Core-Stateless Fair Queueing

- Ingress edge routers compute per-flow rate estimates and insert these estimates as **labels** into each packet header.
- Only edge routers maintain per flow state.
- Labels are updated at each router based only on **aggregate** information.
- FIFO queuing with probabilistic dropping of packets on input is employed at the core routers.



Edge - Core Router Architecture

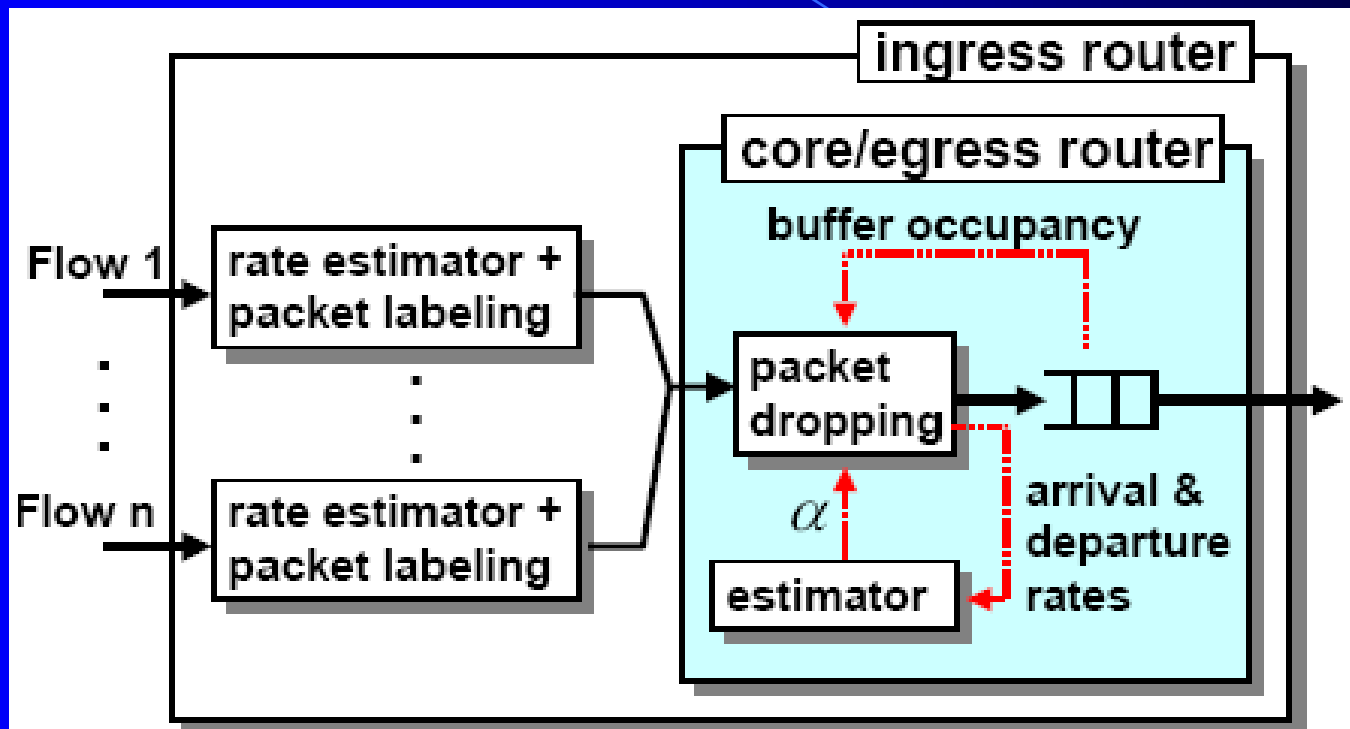


Fig. 2. The architecture of the output port of an edge router, and a core router, respectively.

Fluid Model Algorithm

- Assume the bottleneck router has an output link with capacity C .
- Assume each flow's arrival rate, $r_i(t)$, is *known precisely*.

The main idea is that **max-min fair bandwidth allocations** are characterized such that all flows that are bottlenecked by a router have **the same output rate**.

- This rate is called the **fair share rate** of the link.
- Let $\alpha(t)$ be the fair share rate at time t .



Fluid Model Algorithm

If max-min bandwidth allocations are achieved, each flow receives service at a rate given by

$$\min(r_i(t), \alpha(t))$$

Let $A(t)$ denote the total arrival rate:

$$A(t) = \sum_{i=1}^n r_i(t)$$

If $A(t) > C$, then the fair share is the unique solution to

$$C = \sum_{i=1}^n \min(r_i(t), \alpha(t)),$$

Fluid Model Algorithm

Thus, the probabilistic fluid forwarding algorithm that achieves fair bandwidth allocation is:

Each incoming bit of flow i is dropped with probability

$$\max(0, 1 - a(t)/r_i(t)) \quad (2)$$

These dropping probabilities yield fair share arrival rates at the next hop.

Packet Algorithm

- Moving from a bit-level, bufferless fluid model to a packet-based, buffer model with unknown arrival rates leaves two challenges:
 - Estimate the flow arrival rates $r_i(t)$
 - Estimate the fair share $\alpha(t)$
- This is possible because the rate estimator incorporates the packet size.



Flow Arrival Rate

At each edge router, use exponential averaging to estimate the rate of a flow. For flow i , let

l_i^k be the length of the k^{th} packet.

t_i^k be the arrival time of the k^{th} packet.

Then the estimated rate of flow i , r_i is updated every time a new packet is received:

$$r_i^{\text{new}} = (1 - e^{-T/K}) L / T + (e^{-T/K}) r_i^{\text{old}} \quad (3)$$

where

$$T = T_i^k = t_i^k - t_i^{k-1}$$

$$L = l_i^k \quad \text{and} \quad K \text{ is a constant}$$

Link Fair Rate Estimation

If we denote the estimate of the fair share by $\hat{\alpha}(t)$ and the acceptance rate by $F(\hat{\alpha}(t))$, we have

$$F(\hat{\alpha}(t)) = \sum_{i=1}^n \min(r_i(t), \hat{\alpha}(t))$$

Note – if we know $r_i(t)$, then $\hat{\alpha}(t)$ can be determined by finding the unique solution to $F(x) = C$.

However, this requires per-flow state !

Instead, aggregate measurements of F and A are used to compute $\hat{\alpha}(t)$.

Heuristic Algorithm

- The heuristic algorithm needs three aggregate state variables:

$\hat{\alpha}(t)$, \hat{A} , \hat{F} where \hat{A} is the estimated aggregate arrival rate and \hat{F} is the estimated accepted traffic rate .

- When a packet arrives, the router computes:

$$\hat{A}_{new} = (1 - e^{-T/K_\alpha}) \frac{l}{T} + e^{-T/K_\alpha} \hat{A}_{old} \quad (5)$$

where T is the interarrival time between the current and previous packet.

- and similarly computes \hat{F} .

CSFQ Algorithm

When a packet arrives, \hat{A} is updated using exponential averaging (equation 5).

If the packet is dropped, \hat{F} remains the same.

If the packet is not dropped, \hat{F} is updated using exponential averaging.

At the end of an epoch (defined by K_c), if the link is congested during the whole epoch, update $\hat{\alpha}(t)$:

$$\hat{\alpha}_{new} = \hat{\alpha}_{old} \frac{C}{\hat{F}}$$

CSFQ Algorithm (cont.)

- If the link is not congested, $\hat{\alpha}_{new}$ is set to the largest rate of any active flow seen during the last K_c time units.
- $\hat{\alpha}_{new}$ feeds into the calculation of drop probability, p , for the next arriving packet as α in

$$p = \max(0, 1 - \alpha / \text{label})$$

CSFQ Algorithm (cont.)

- Estimation inaccuracies may cause \hat{F} to exceed link capacity.
- Thus, to limit the effect of Drop Tail buffer overflows, every time the buffer overflows $\hat{\alpha}_{new}$ is decreased by 1% in the simulations.
- If link becomes uncongested, algorithm assumes it remains uncongested until buffer occupancy reached 50% or higher.

CSFQ Pseudo Code

```
on receiving packet  $p$ 
  if (edge router)
     $i = \text{classify}(p)$ ;
     $p.\text{label} = \text{estimate\_rate}(r_i, p)$ ; // use Eq. (3)
     $\text{prob} = \max(0, 1 - \alpha/p.\text{label})$ ;
    if ( $\text{prob} > \text{unif\_rand}(0, 1)$ )
       $\alpha = \text{estimate\_}\alpha(p, 1)$ ;
      drop( $p$ );
    else
       $\alpha = \text{estimate\_}\alpha(p, 0)$ ;
      enqueue( $p$ );
      if ( $\text{prob} > 0$ )
         $p.\text{label} = \alpha$ ; // relabel  $p$ 
```

Figure 3

CSFQ Pseudo Code

```
estimate_α(p, dropped)
// α̂ and α_Kc are initialized to 0;
// α_Kc is used to compute the largest packet label seen
// during a window of size Kc
Â = estimate_rate(Â, p); // est. arrival rate (use Eq. (5))
if (dropped == FALSE)
    F̂ = estimate_rate(F̂, p); // est. accepted traffic rate
if (Â ≥ C)
    if (congested == FALSE)
        congested = TRUE;
        start_time = crt_time;
        if (α̂ == 0)
            // α̂ can be set to 0 if no packet is received
            // during a widow of size Kc
            α̂ = max(p.label, α_Kc);
        else
            if (crt_time > start_time + Kc)
                α̂ = α̂ × C / F̂;
                start_time = crt_time;
    else // Â < C
        if (congested == TRUE)
            congested = FALSE;
            start_time = crt_time;
            α_Kc = 0;
        else
            if (crt_time < start_time + Kc)
                α_Kc = max(α_Kc, p.label);
            else
                α̂ = α_Kc;
                start_time = crt_time;
                α_Kc = 0;
return α̂;
```


Label Rewriting

- At core routers, outgoing rate is merely the minimum between the incoming rate and the fair rate, α .
- Hence, the packet label L can be rewritten by

$$L_{\text{new}} = \min(L_{\text{old}}, \alpha)$$

Outline

- Introduction
- Core-Stateless Fair Queueing (CSFQ)
 - Fluid Model Algorithm
 - Packet Algorithm
 - Flow Arrival Rate
 - Link Fair Share Rate Estimation
- **NS Simulations**
- Conclusions



Simulations

- A major effort of the paper is to compare CSFQ to four algorithms via ns-2 simulations.
- FIFO
- **RED**
- FRED (Flow Random Early Drop)
- DRR (Deficit Round Robin)



FRED (Flow Random Early Drop)

- Maintains per flow state in router.
- FRED preferentially drops a packet of a flow that has either:
 - Had many packets dropped in the past
 - A queue larger than the average queue size
- Main goal : Fairness
- FRED-2 guarantees a minimum number of buffers for each flow .



DRR (Deficit Round Robin)

- Represents an efficient implementation of **WFQ**.
- A sophisticated per-flow queueing algorithm.
- Scheme assumes that when router buffer is full, the packet from the longest queue is dropped.
- Can be viewed as the “best case” algorithm with respect to fairness.



ns-2 Simulation Details

- Use TCP, UDP, RLM (Receiver-driven Layered Multicast) and On-Off traffic sources in separate simulations.
- Bottleneck link: 10 Mbps, 1ms latency, 64KB buffer
- CSFQ threshold is 16KB.
- RED, FRED (min, max) thresholds: (16KB, 32KB)
- K and $K_c = 100$ ms. $K_a = 200$ ms.



A Single Congested Link

- First Experiment : **32 UDP CBR** flows
 - Each UDP flow is indexed from 0 to 31 with flow 0 sending at 0.3125 Mbps and each of the i subsequent flows sending **($i+1$)** times its fair share of 0.3125 Mbps.
- Second Experiment : **1 UDP CBR** flow, **31 TCP** flows
 - UDP flow sends at 10 Mbps
 - 31 TCP flows share a **single** 10 Mbps link.

Figure 5b: 32 UDP Flows


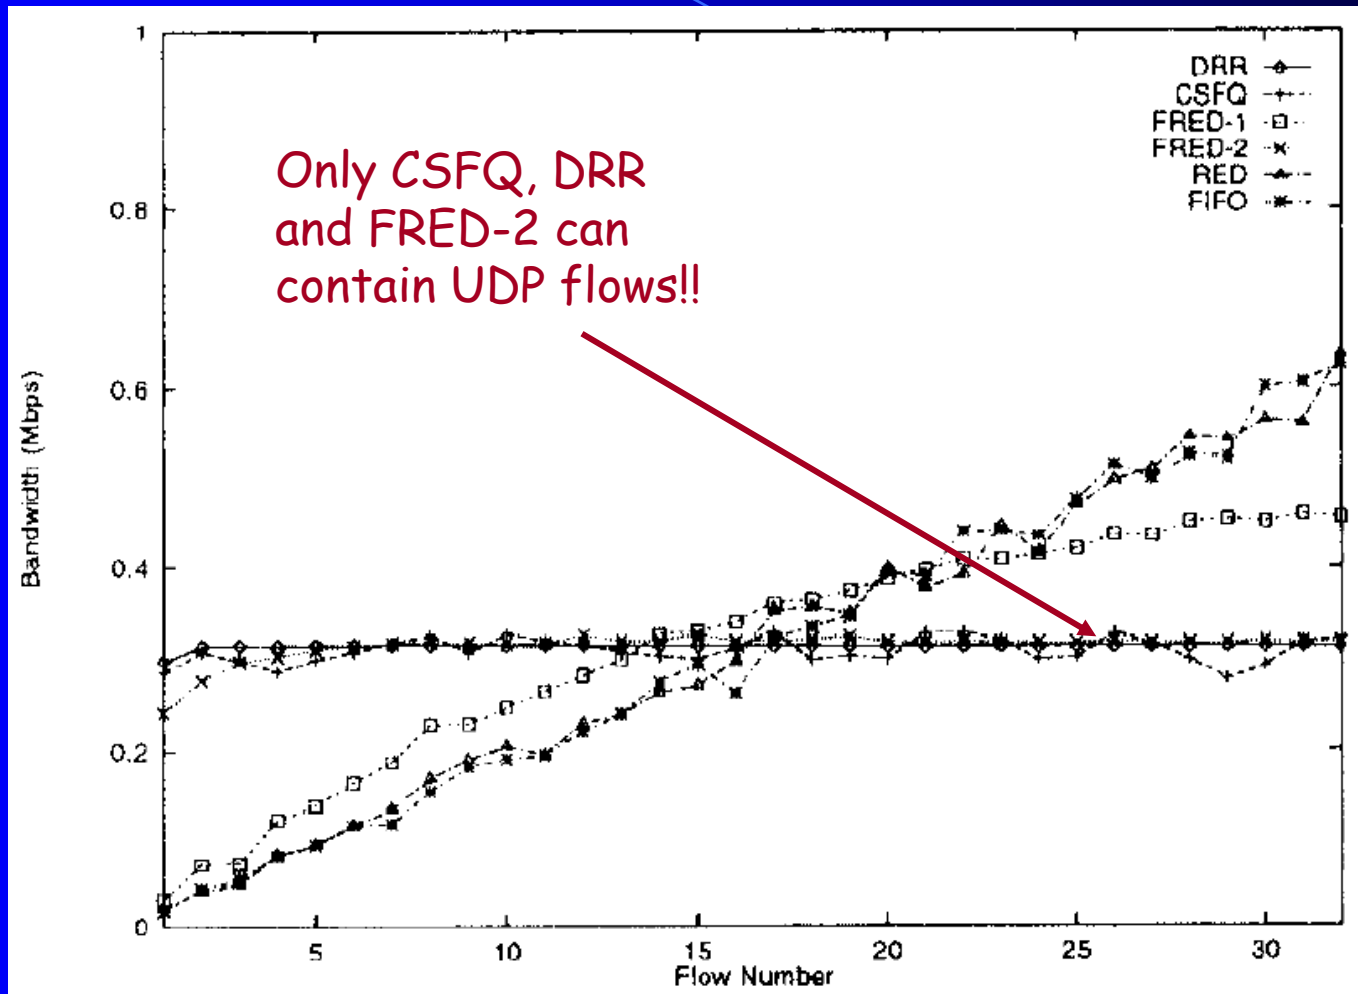


Figure 6a : One UDP Flow, 31 TCP Flows

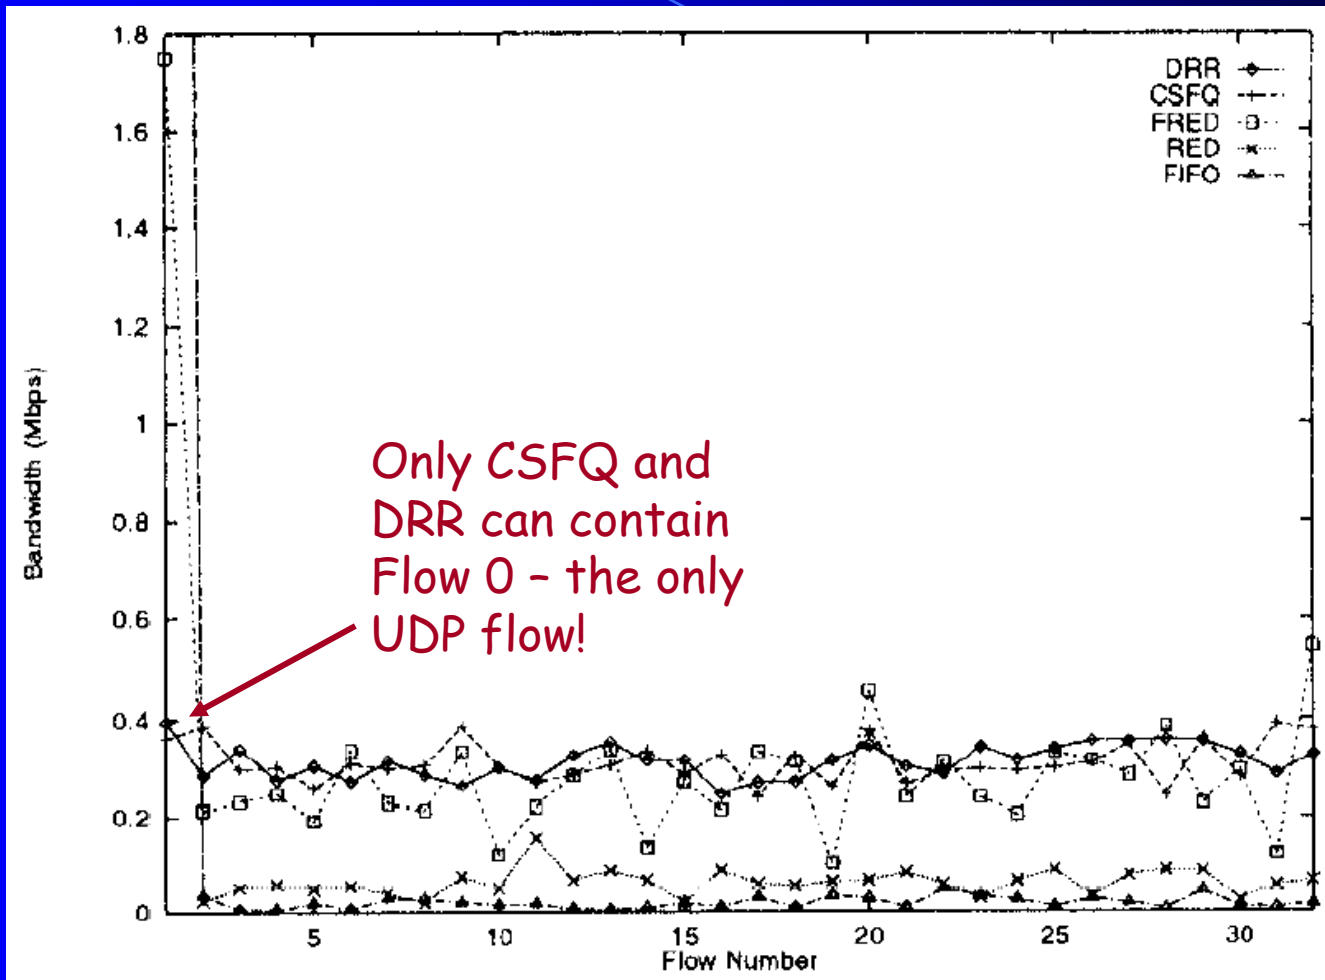

A Single Congested Link

- Third Experiment Set : 31 simulations
 - Each simulation has a different N ,
 $N = 2 \dots 32$.
 - One TCP and $N-1$ UDP flows with each UDP flow sending at **twice** the fair share rate of $10/(N + 1)$ Mbps.

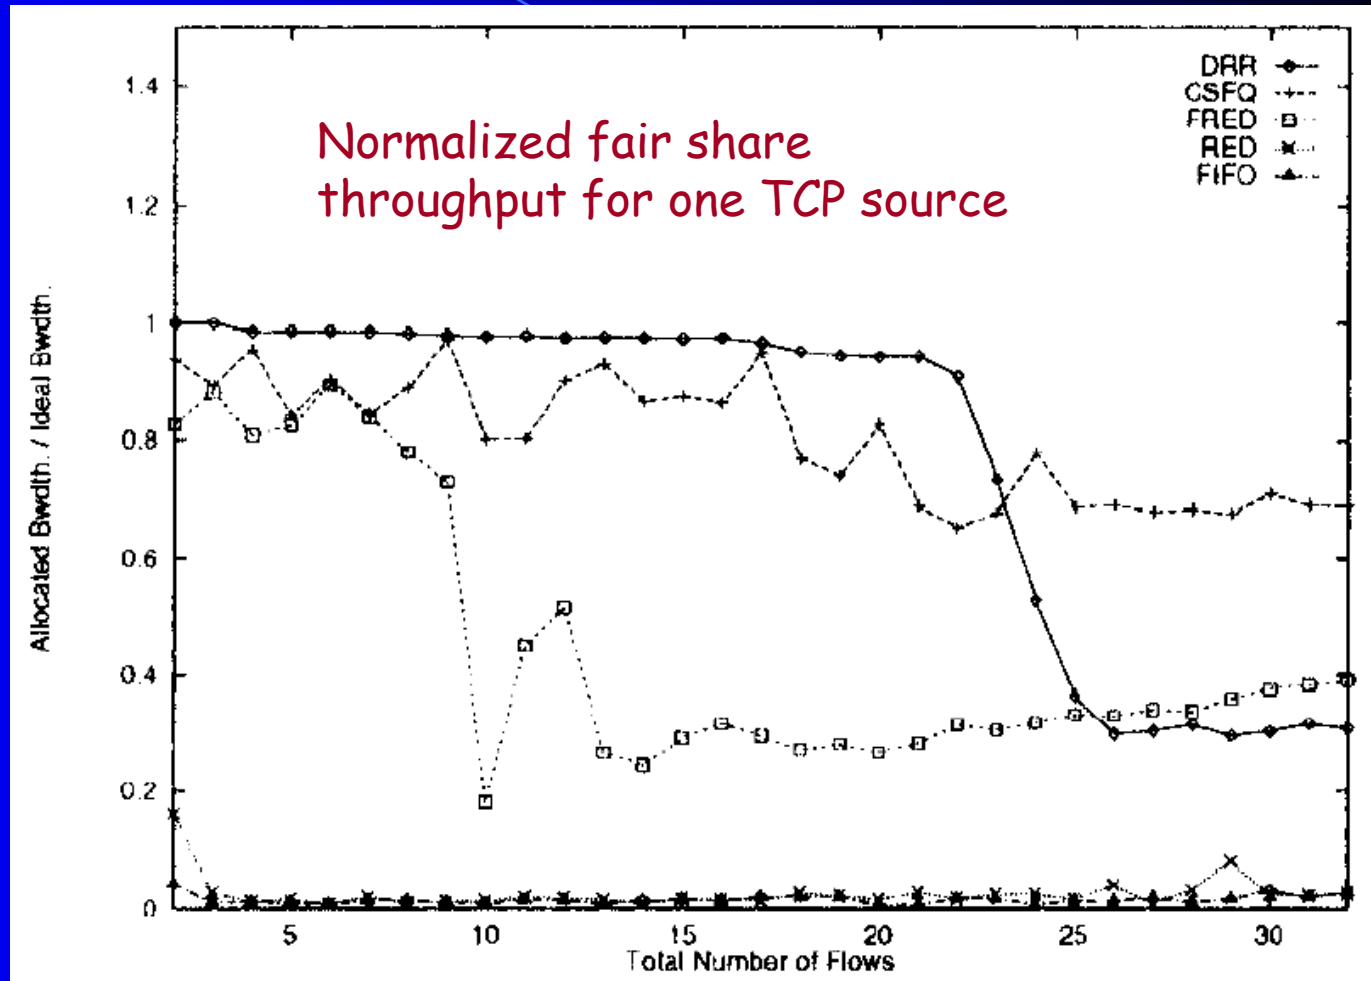


Figure 6b : One TCP Flow, N-1 UDP Flows


DRR good for less than 22 flows.

CSFQ better than DRR when a large number of flows.

CSFQ beats FRED.



Multiple Congested Links

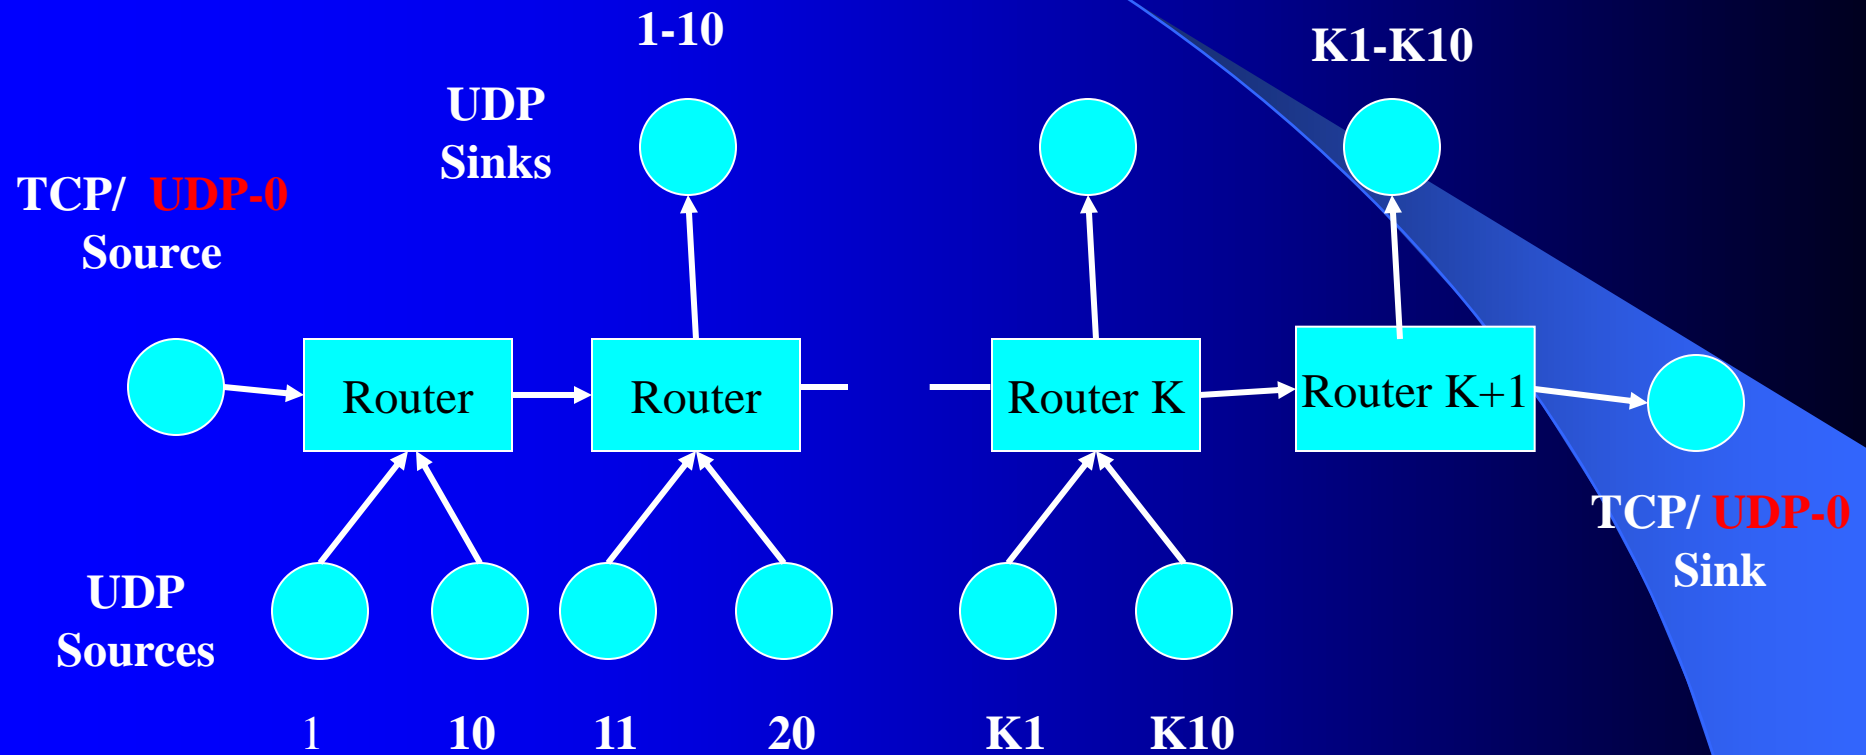

Multiple Congested Links

- First experiment : **CBR UDP flow 0** sends at its fair share rate, 0.909 Mbps while the other ten “crossing” UDP flows send at 2 Mbps.
- Second experiment: Replace the UDP flow with one TCP flow and leave the ten crossing UDP flows.

Figure 8a : UDP source


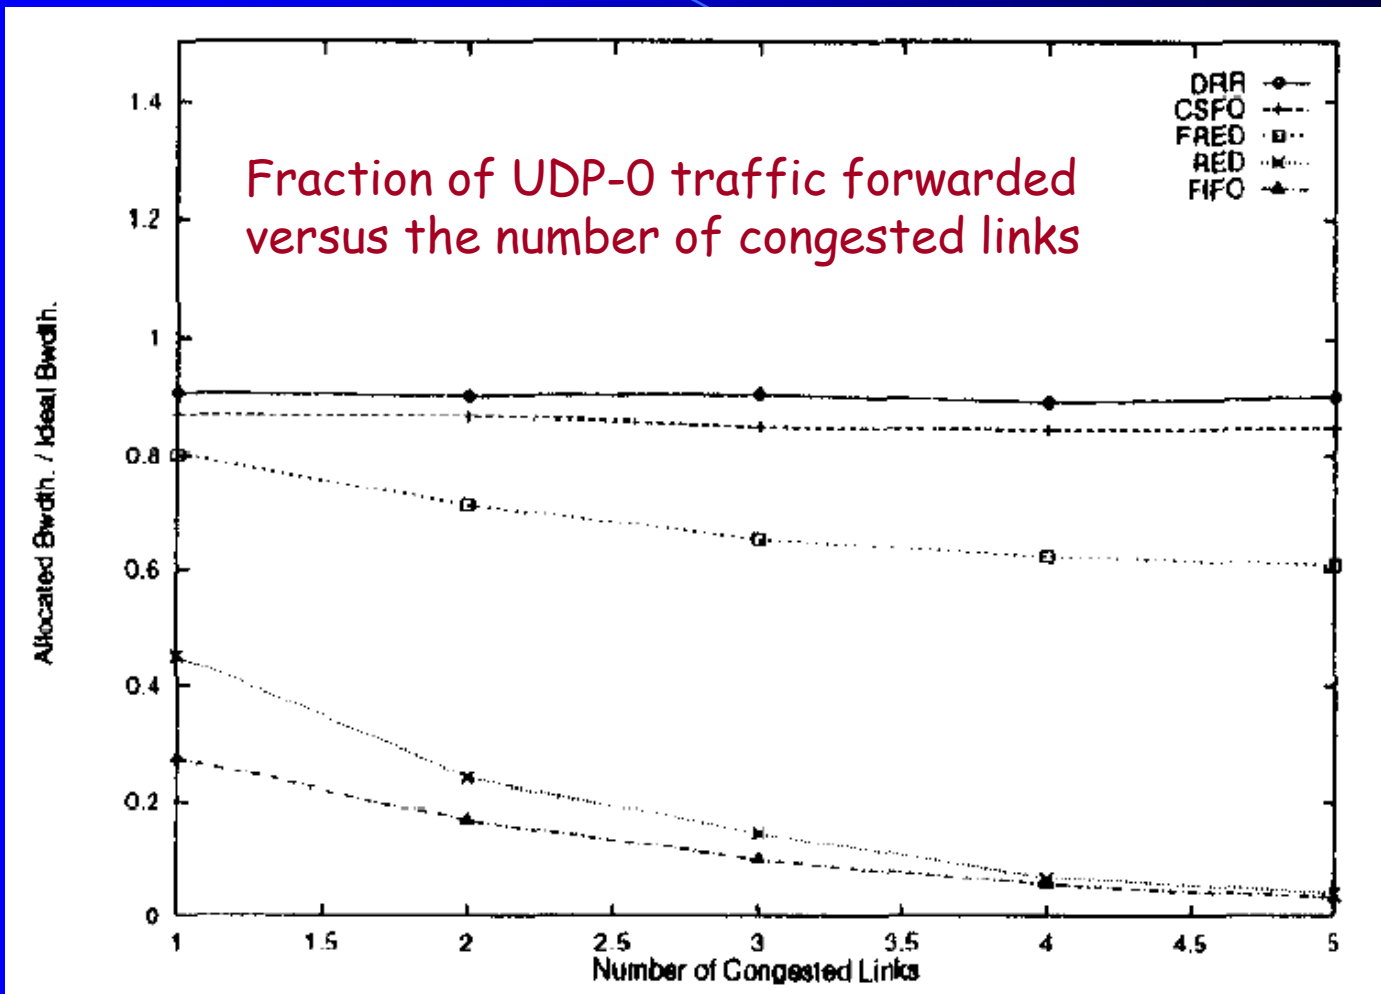


Figure 8b : TCP Source



Receiver-driven Layered Multicast (RLM)

- RLM is an adaptive scheme in which the source sends the information encoded in a number of layers.
- Each layer represents a **different** multicast group.
- Receivers join and leave multicast groups based on packet drops experienced.

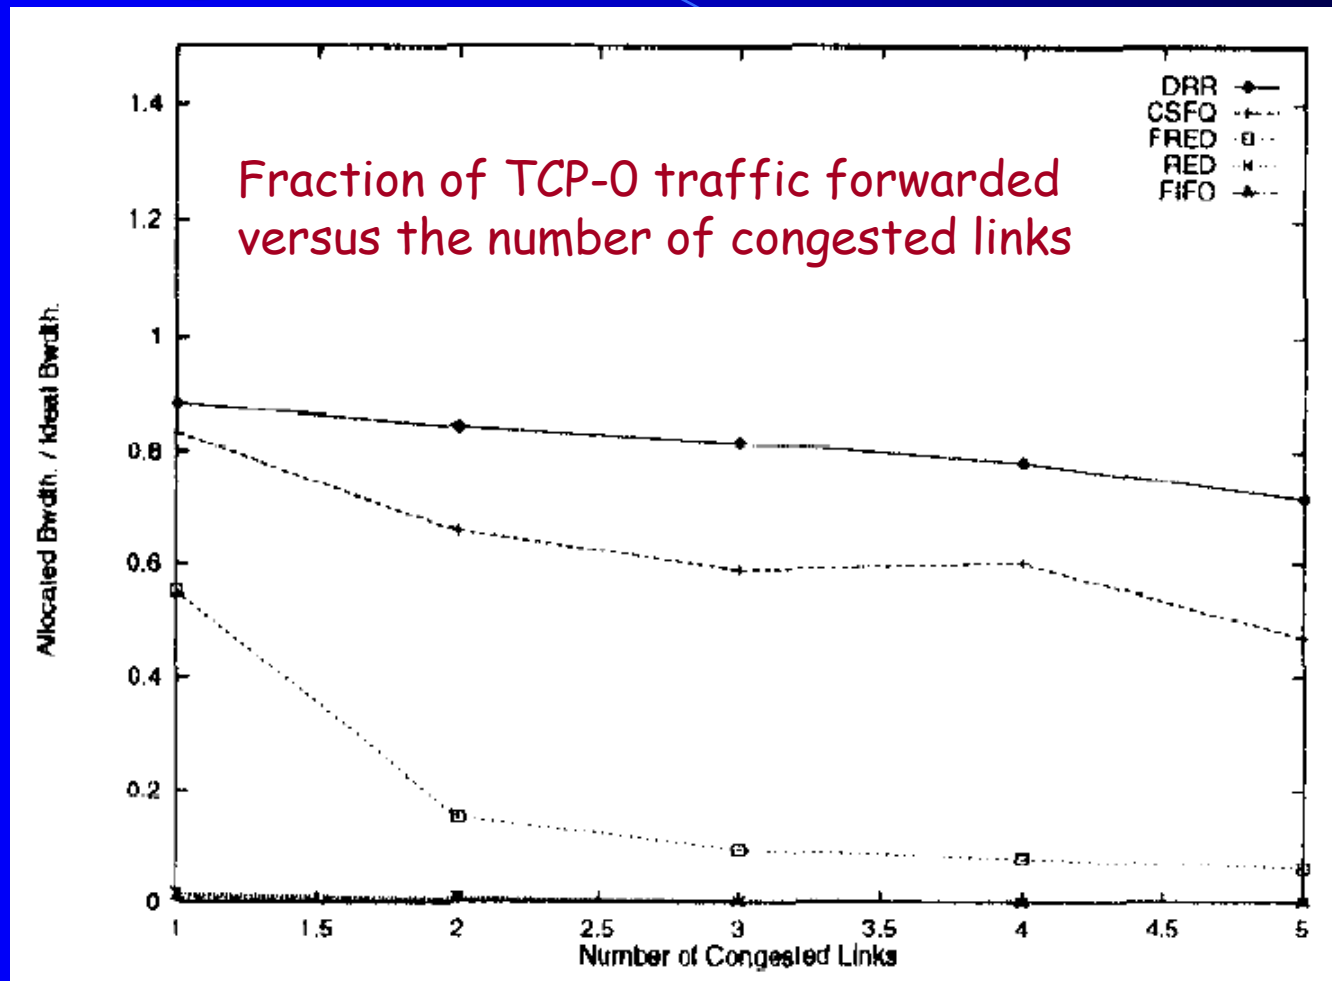

Receiver-driven Layered Multicast (RLM)

- Simulation of **three RLM** flows and **one TCP** flow with a 4 Mbps link.
- Fair share for each is 1 Mbps.
- Since router buffer set to 64 KB, K , K_c , and K_a are set to 250 ms.
- Each RLM layer **I** sends 2^{i+4} Kbps with each receiver subscribing to the first five layers.

Figure 9b : FRED

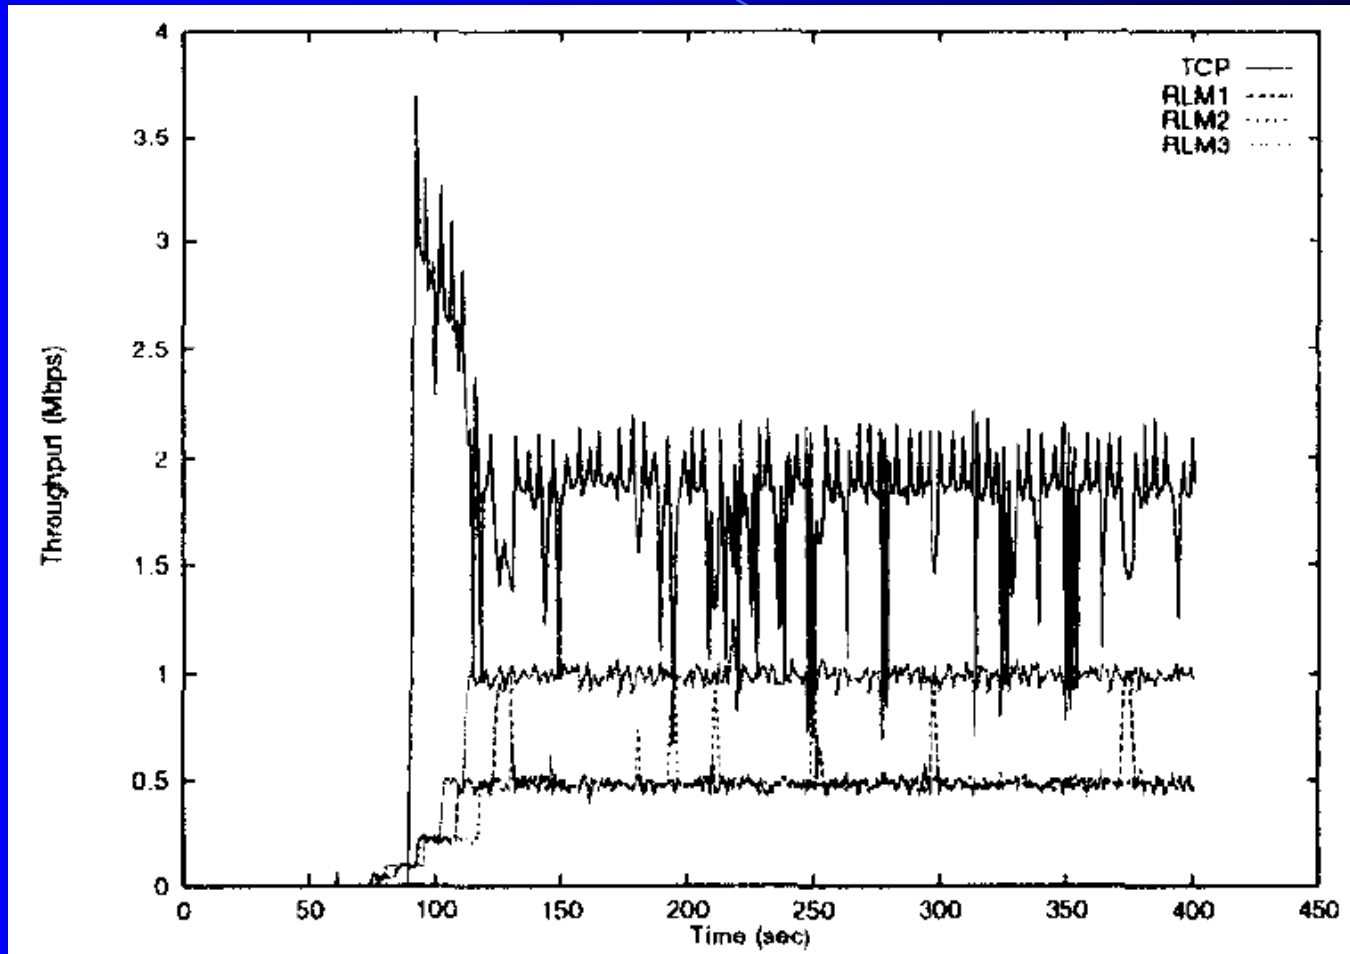


Figure 9e : RED

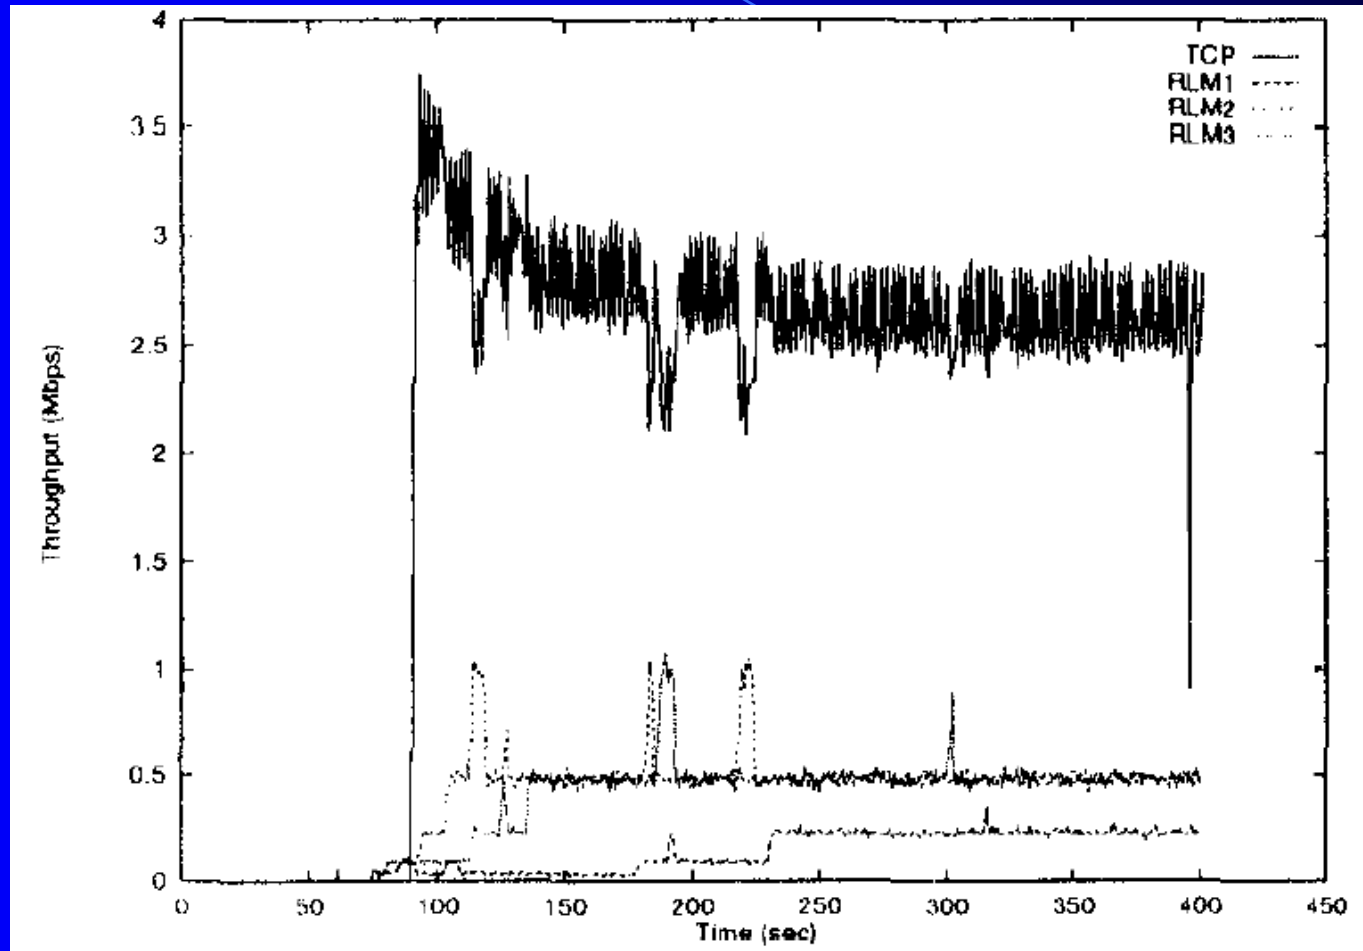


Figure 9f : FIFO


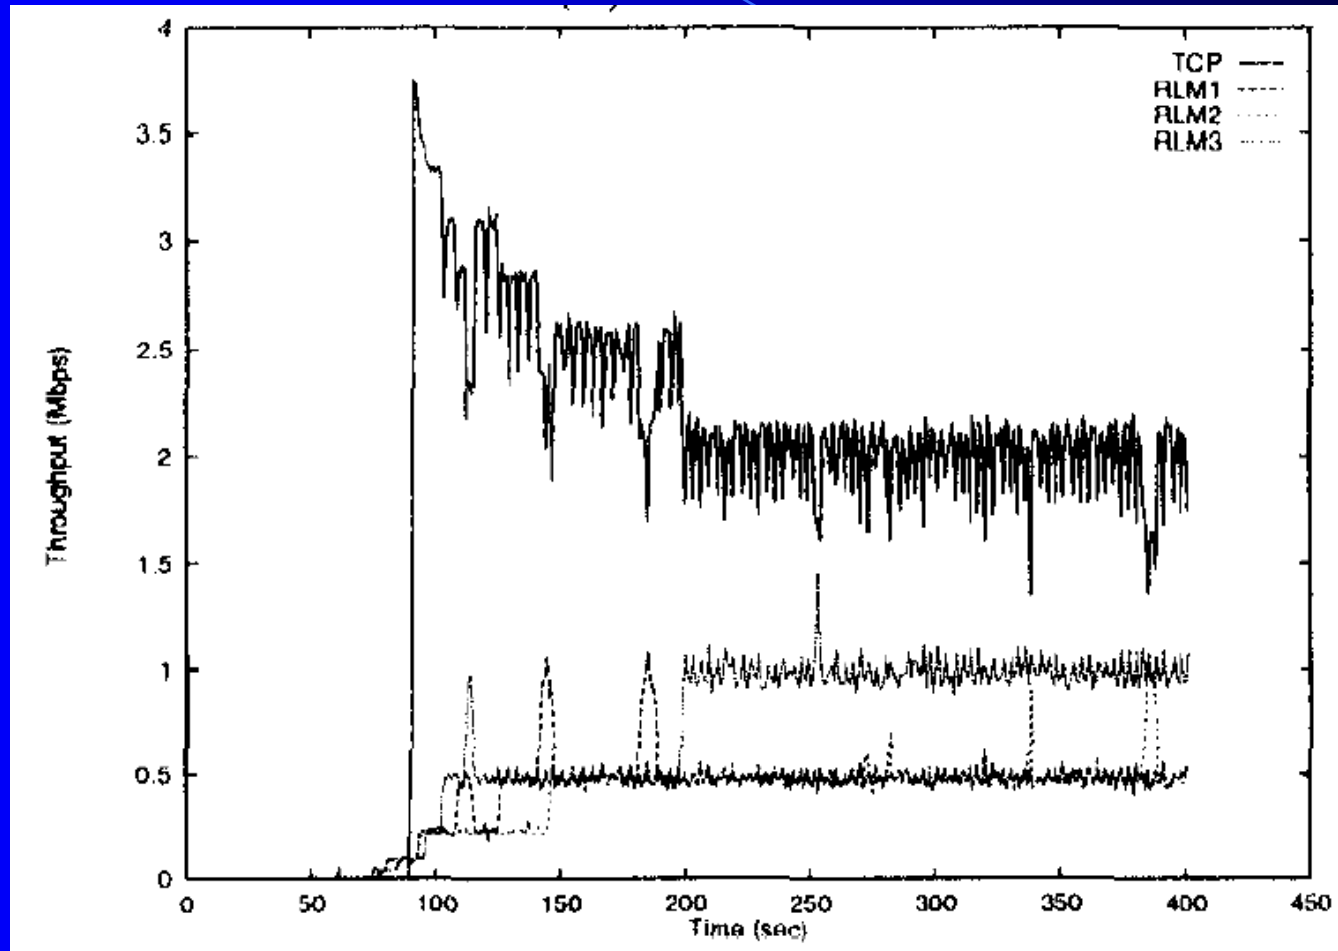


Figure 9a : DRR

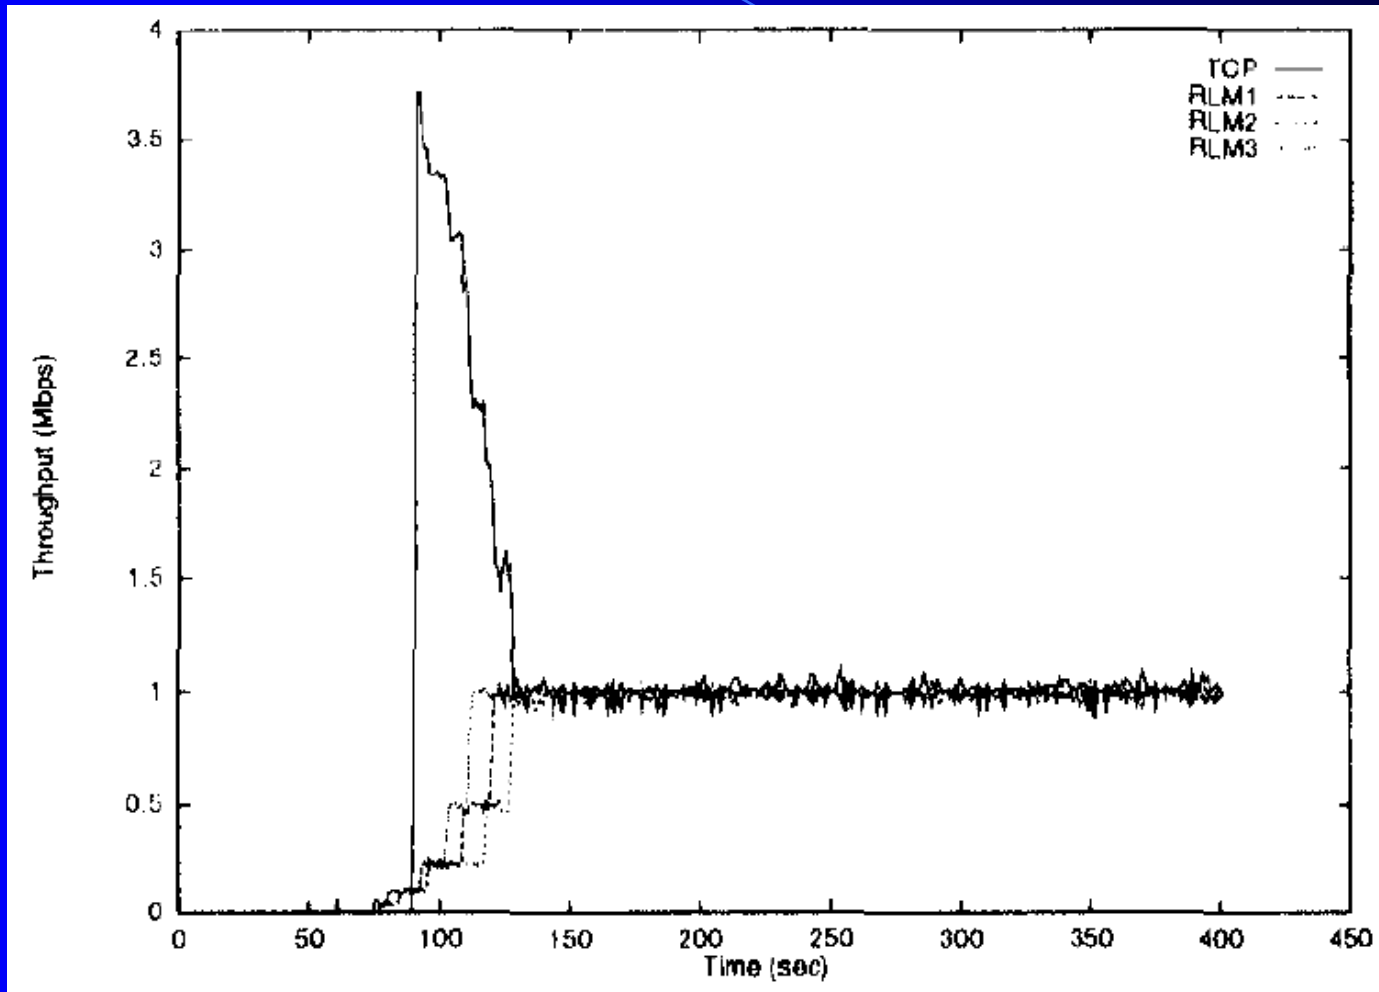

Conference Figure : CSFQ

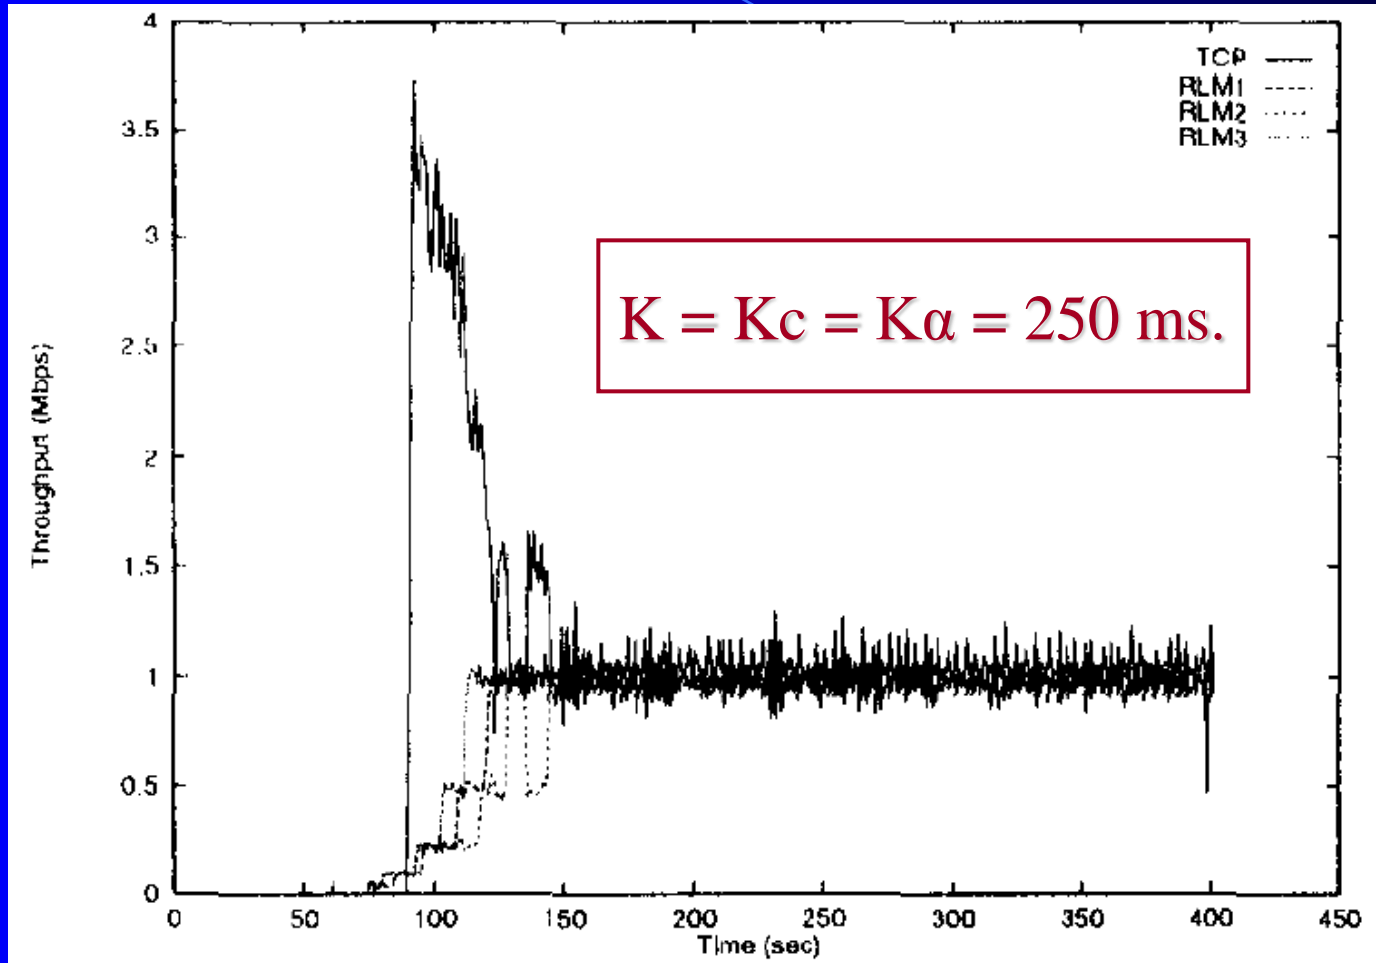


Figure 9c: CSFQ


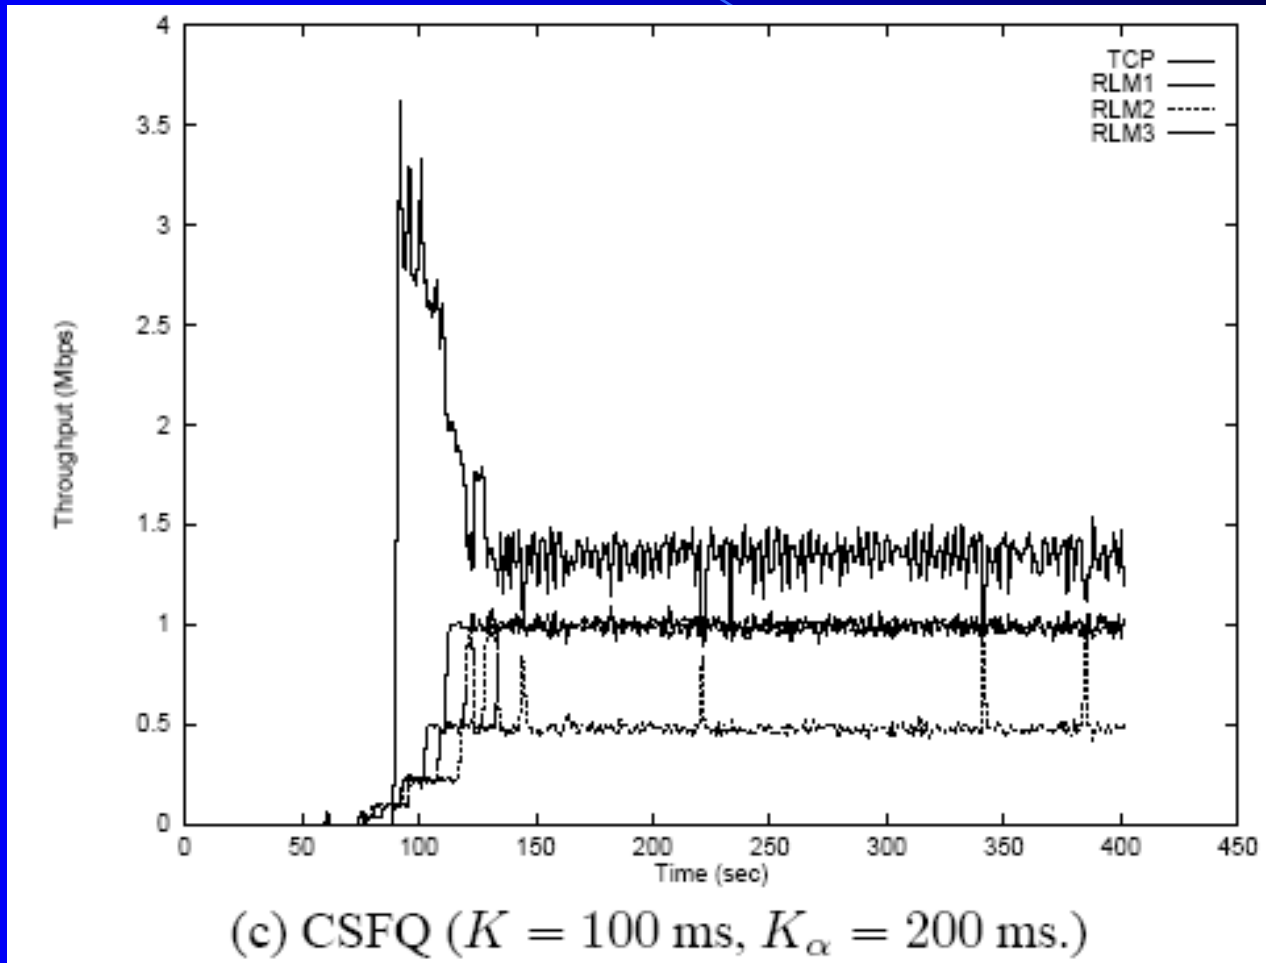


Figure 9d: CSFQ

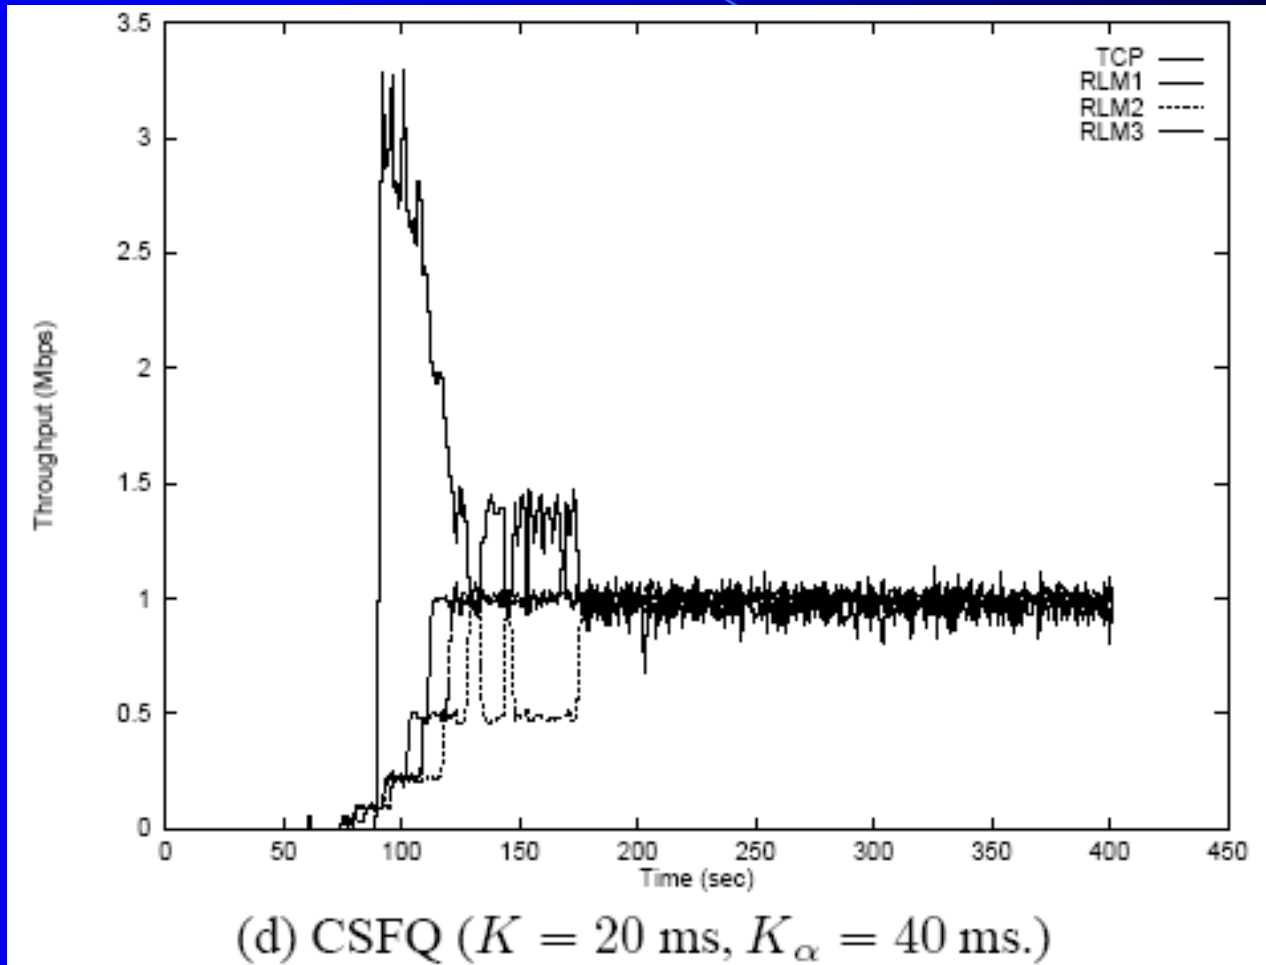

On-Off Flow Model

- One approach to modeling interactive, Web traffic :: OFF represents “think time”.
- ON and OFF times are drawn from exponential distribution with means of 200 ms and 3800 ms respectively (**K set to 200 ms**).
- During ON period source sends at 10 Mbps.
- **19 CBR** flows sending at 0.5Mbps



Table I

One On-Off Flow, 19 CBR Flows

Algorithm	Delivered	Dropped
DRR	1080	3819
CSFQ	1000	3889
FRED	1064	3825
RED	2819	2080
FIFO	3771	1128

4899 packets sent!



Web Traffic

- A second approach to modeling Web traffic uses Pareto Distribution to model the length of a TCP connection.
- In this simulation **60 TCP** flows whose interarrivals are exponentially distributed with mean 0.1 ms and Pareto distribution with shaping parameter 1.06 that yields a mean connection length of 40,1 KB packets.
- **One CBR** flow sending at 10 Mbps.



Table II

60 Short TCP Flows, One CBR Flow

Algorithm	Mean Transfer Time (ms)	Standard Deviation (ms)
DRR	46.38	197.35
CSFQ	88.21	230.29
FRED	73.48	272.25
RED	790.28	1651.38
FIFO	1736.93	1826.74

Table III : 19 TCP Flows, One CBR Flow
with propagation delay of 100 ms

Algorithm	Mean Packets forwarded in 100 s.	Standard Deviation
DRR	5857.89	192.86
CSFQ	5135.05	175.76
FRED	4967.05	261.23
RED	628.10	80.46
FIFO	379.42	68.72

Figure 10

Packet Relabeling

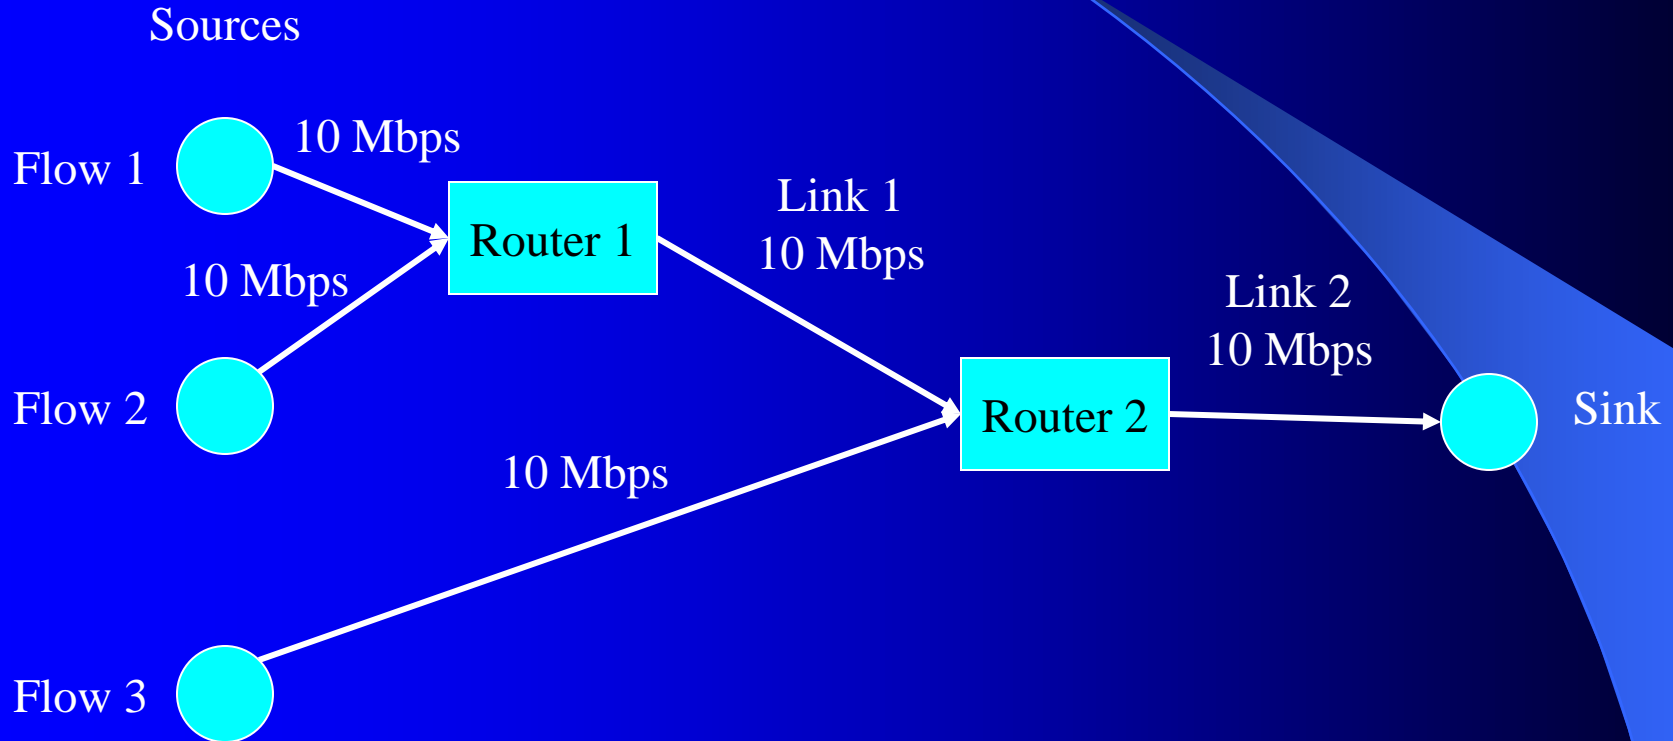


Table IV

UDP and TCP with CSFQ Packet Relabeling

Traffic	Flow 1	Flow 2	Flow 3
CBR	3.267	3.262	3.458
TCP	3.232	3.336	3.358

Link 2 Throughput



Unfriendly Flows

- Using TCP congestion control requires cooperation from other flows.
- Three types cooperation violators:
 - Unresponsive flows (e.g., Real Audio)
 - Not TCP-friendly flows (e.g., RLM)
 - Flows that lie to cheat.
- ***This paper deals with unfriendly flows!!***

Outline

- Introduction
- Core-Stateless Fair Queueing (CSFQ)
 - Fluid Model Algorithm
 - Packet Algorithm
 - Flow Arrival Rate
 - Link Fair Share Rate Estimation
- NS Simulations
- **Conclusions**



Conclusions

- This paper presents Core Stateless Fair Queueing and offers many simulations to show how CSFQ provides better fairness than RED or FIFO.
- They mention issue of “large latencies”. This is the robust versus fragile flow issue from FRED paper.
- **CSFQ 'clobbers' UDP flows!**

Significance

- First paper to use hints from the edge of the subnet.
- Deals with UDP as CBR flows. Many AQM algorithms ignore UDP.
- Makes a reasonable attempt to look at a variety of traffic types.

Problems/ Weaknesses

- “Epoch” is related to three **K** constants in a way that can produce different results.
- How does one set the three **K** constants for a variety of situations?
- There is no discussion of algorithm “stability”.

Acknowledgments

- Figures extracted from presentation by Nagaraj Shirali and Choong-Soo Lee in Spring 2002 and modified for annotations.

