

Performance Analysis of the Intertwined Effects between Network Layers for 802.11g Transmissions

Jon Gretarsson, Feng Li, Mingzhe Li, Ashish Samant,
Huahui Wu, Mark Claypool and Robert Kinicki
WPI Computer Science Department
Worcester, MA, 01609 USA

Presenter - Bob Kinicki

*Wireless Multimedia Networking and
Performance Modeling (WMuNeP)*
Montreal, Canada, October 2005



Outline

- ***Motivation***
- **Previous Work**
 - Analytic Models
 - Measurement Studies
- **Experiments**
 - Tools and Setup
 - Experimental Design
- **Results and Analysis**
- **Conclusions and Future Work**

Motivation

- Previous research has studied WLAN performance through analytic modeling, simulation and measurement.
- However, the conclusions drawn have not always been precise and the results have focused on one protocol layer (primarily the data link layer).

- **Important Question:**

Is Quality of Service (QoS) a realistic goal over WLAN's?

- We are interested in “refining” how one application running over a Wireless LAN (WLAN) can impact another application.
- The interaction between protocol layers can yield results that can significantly impact performance when multiple applications run over a WLAN.


Outline

- **Motivation**
- ***Previous Work***
 - Analytic Models
 - Measurement Studies
- **Experiments**
 - Tools and Setup
 - Experimental Design
- **Results and Analysis**
- **Conclusions and Future Work**

Analytic Models of 802.11

- [Cali et al. 98] “IEEE 802.11 Wireless LAN: Capacity Analysis and Protocol Enhancement”
 - Models early 802.11, i.e., no dynamic rate adaptation.
 - Models the “ideal” channel: no transmission errors, no hidden terminals.
- [Bianchi 2000] “Performance Analysis of the IEEE 802.11 Distributed Coordination Function”
 - Uses the same assumptions as Cali, but emphasizes the “saturation” throughput such that the transmission queue of each wireless node is never empty.
- [Heuss et al 03] “Performance Anomaly of 802.11b”
 - Employs analytic equations based on simplified version of Bianchi including **no multiple collisions (no retries) and hosts alternate transmissions.**
 - Focuses on dynamic rate adaptation effect.
 - Conclusion: **A single slow wireless node brings all wireless nodes down to its throughput level.**
 - Simulate and measure, but measurement uses only upstream UDP and TCP.
 - Note: TCP results do not match very well.

Generic WLAN with AP

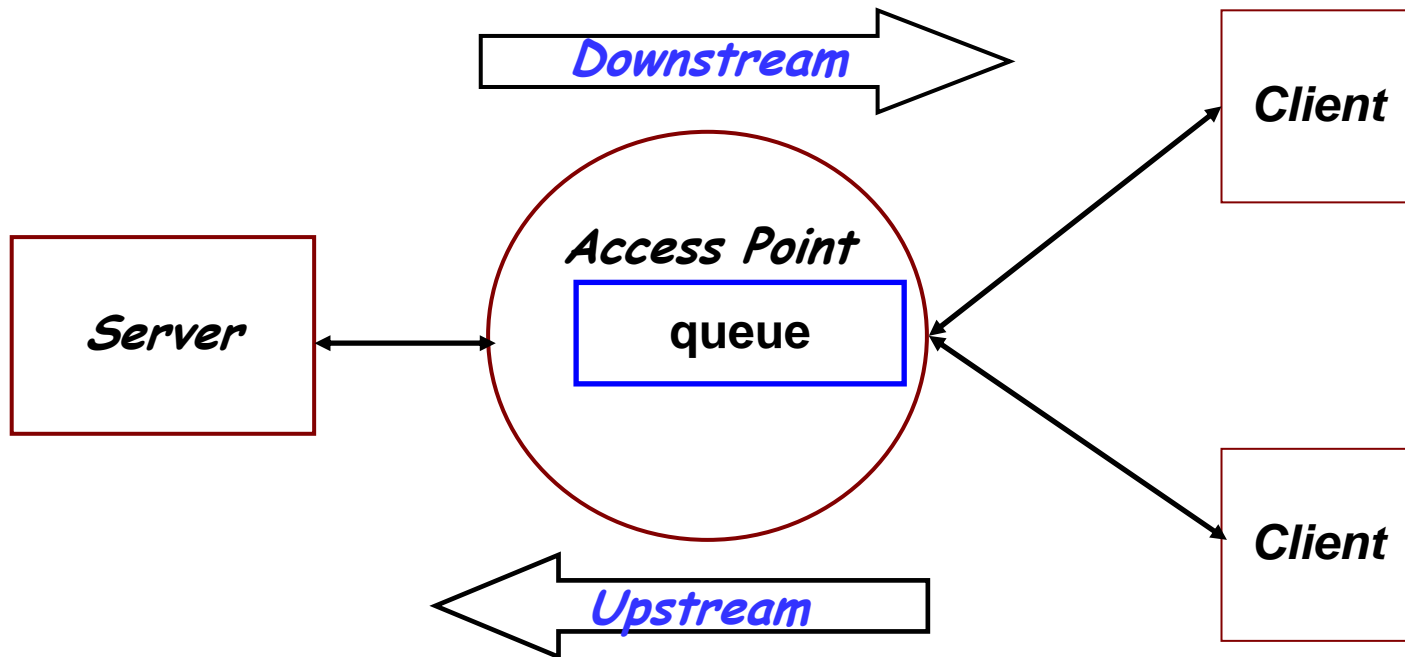

Measurement Studies of 802.11

- [Pilosof et al. 03] “Understanding TCP fairness over Wireless LAN”
 - Predominantly simulation, but includes one set of measurement results to show that TCP upstream dominates over TCP downstream with background UDP traffic that makes buffers available at the AP the critical resource.
- [Aguayo et al. 04] “Link-level Measurements from an 802.11b Mesh Network”
 - Perform early morning measurements of Roofnet where there is one sender at a time.
 - Conclude there is not a strong correlation with link distance and SNR with link level loss rates and that an important cause of intermediate loss rates is multi-path fading.

Measurement Studies of 802.11

- [[Bai and Williamson 04] “The Effects of Mobility on Wireless Media Streaming Performance”
 - Create their own AP device to vary queue size.
 - Downstream measurements of UDP videos show WLAN supports easily two fixed clients receiving 1Mbps video clips with AP queue < 30 buffers.
 - When one client becomes mobile, it goes through “**bad**” locations and frames get discarded, rate adaptation moves to 1 Mbps, AP queue backlogs and overflows!!
 - When one client fixed and one client mobile, mobile client kills performance of fixed client because the MAC-layer queue fills with frames from poorly-connected client. The AP queue is the bottleneck.
- [Yarvis et al. 05] “Characteristics of 802.11 Wireless Networks”
 - Consider: transmission rate, transmission power, node location, house type.
 - Conduct measurements in three homes with **link layer retransmissions disabled**.
 - Discover: wireless performance can be quite asymmetric, node placement can be a key factor, no correlation with physical distance.

Outline

- **Motivation**
- **Previous Work**
 - Analytic Models
 - Measurement Studies
- ***Experiments***
 - Tools and Setup
 - Experimental Design
- **Results and Analysis**
- **Conclusions and Future Work**

Tools & Experimental Setup

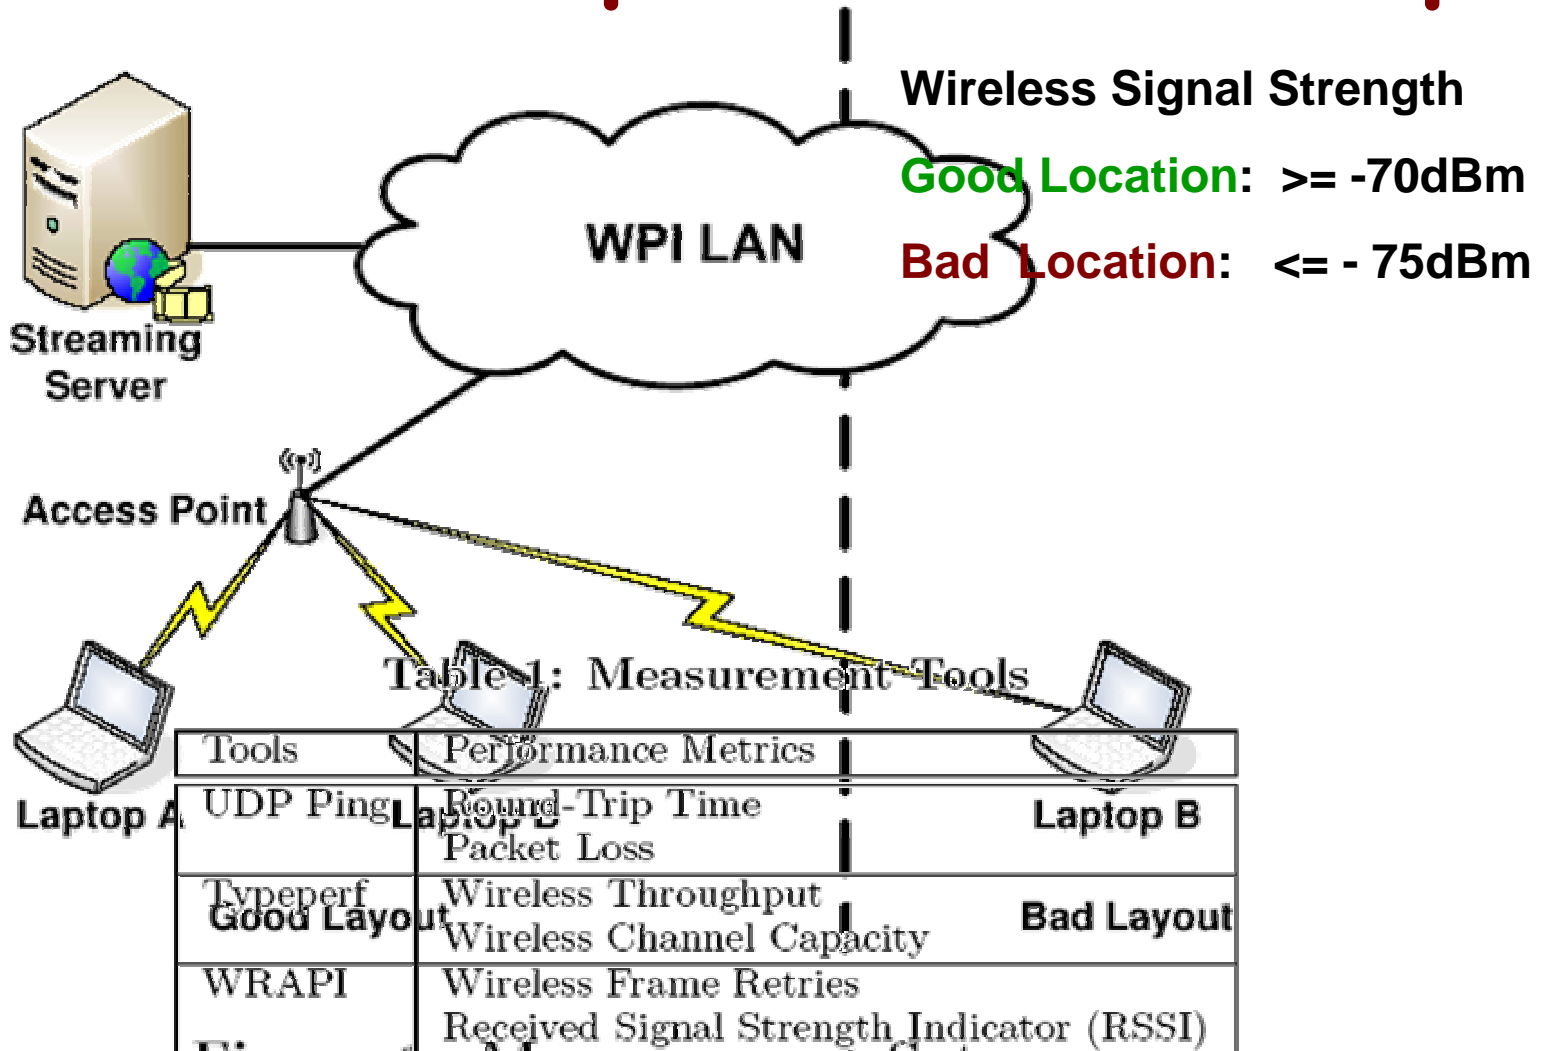


Figure 1: Measurement Setup

Experiments

Table 2: Experiment Cases

Case	Host A	Host B	
	Good Location	Good Location	Bad Location
1	TCP Download	-	-
2	TCP Download	TCP Download	-
3	TCP Download	-	TCP Download
4	TCP Download	-	UDP Stream
5	TCP Download	-	TCP Stream
6	TCP Download	TCP Stream	-
7	TCP Download	UDP Stream	-
8	-	-	TCP Stream
9	-	-	UDP Stream


Streaming Video Characteristics

Length : 2 minutes Encoding bit rate: 5Mbps
Resolution: 352 x 288 Frame Rate : 24 fps

Experimental Design

- The two laptops are positioned in “exactly” the same location with the same physical orientation and at locations known for little wireless traffic.
- All experiments were conducted at night to minimize motion (from people).
- Although the videos stream for two minutes, our analysis uses data between the 50-100 second interval.
- Each experiment was repeated three times.

Consistency Test

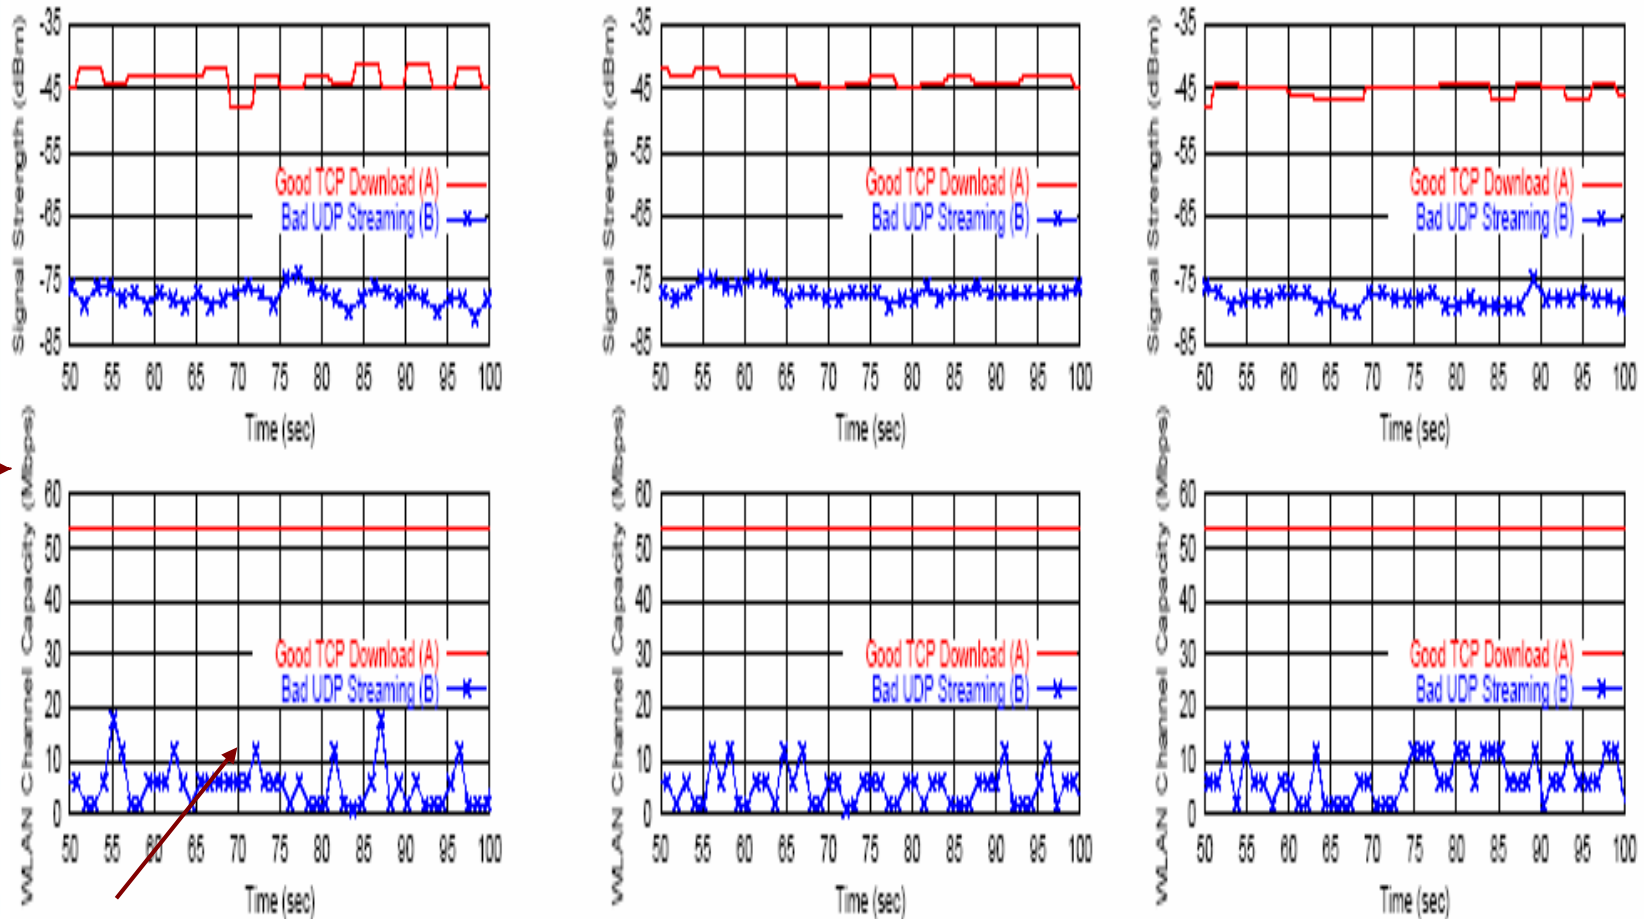

dynamic rate adaptation

Figure 2: Wireless Signal Strength and Channel Capacity for Three Separate Runs

Outline

- **Motivation**
- **Previous Work**
 - Analytic Models
 - Measurement Studies
- **Experiments**
 - Tools and Setup
 - Experimental Design
- ***Results and Analysis***
- **Conclusions and Future Work**

A Single TCP Download

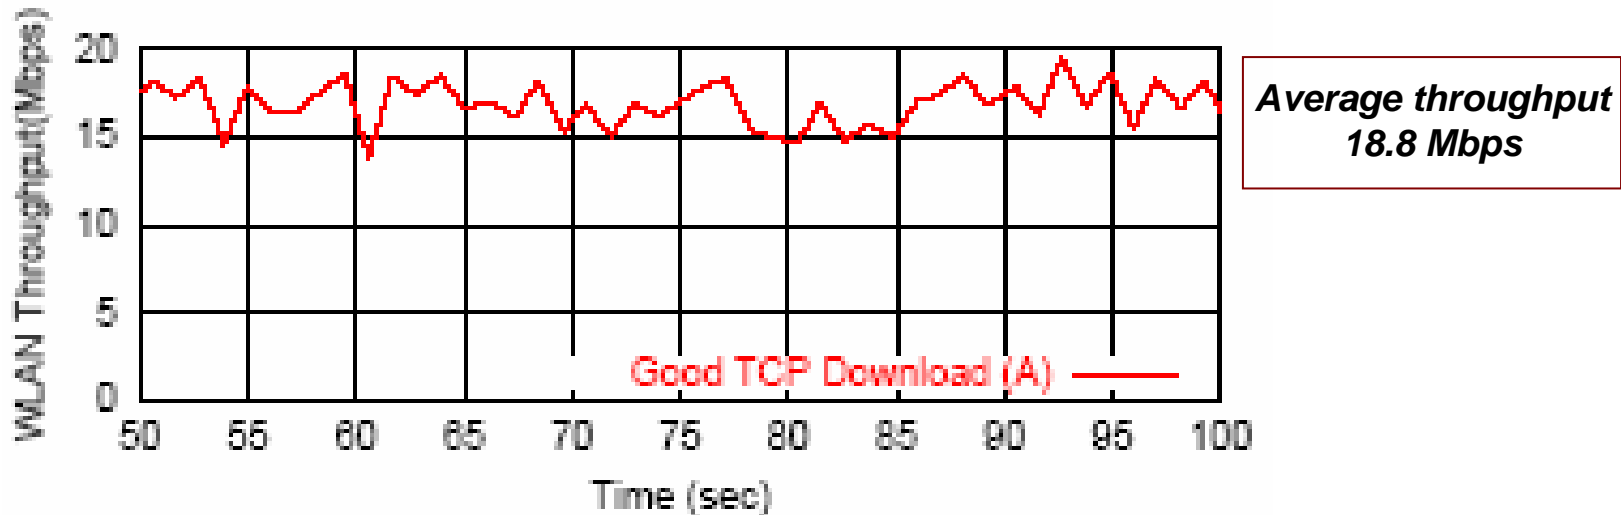


Fig 3a TCP Download to a Good Location

802.11 Performance Anomaly

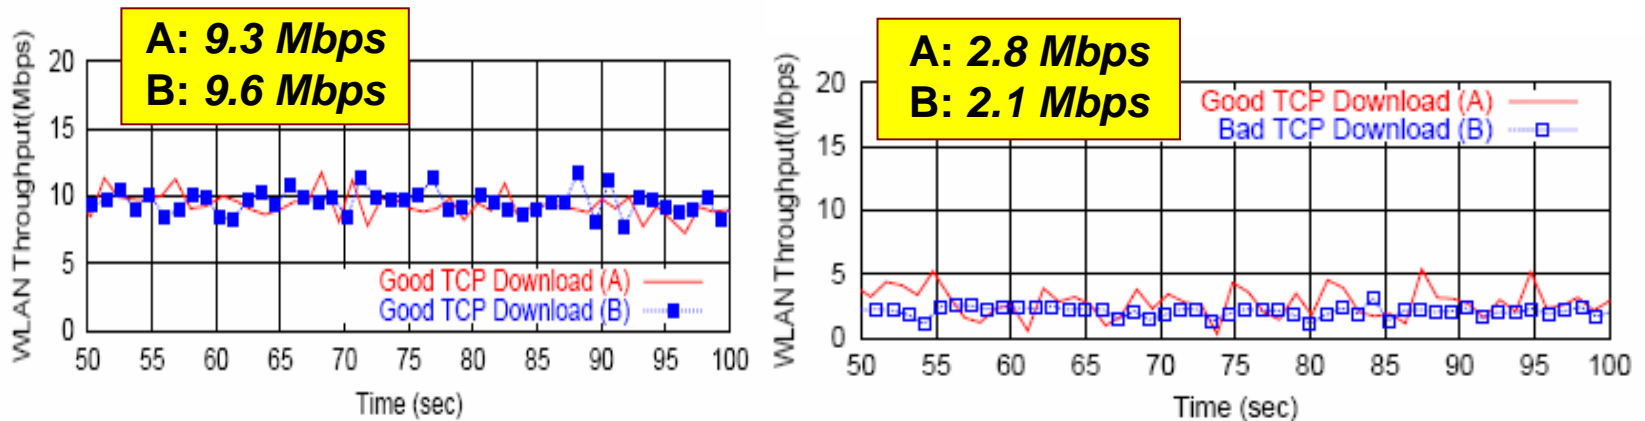


Fig 3 TCP Throughput Comparison

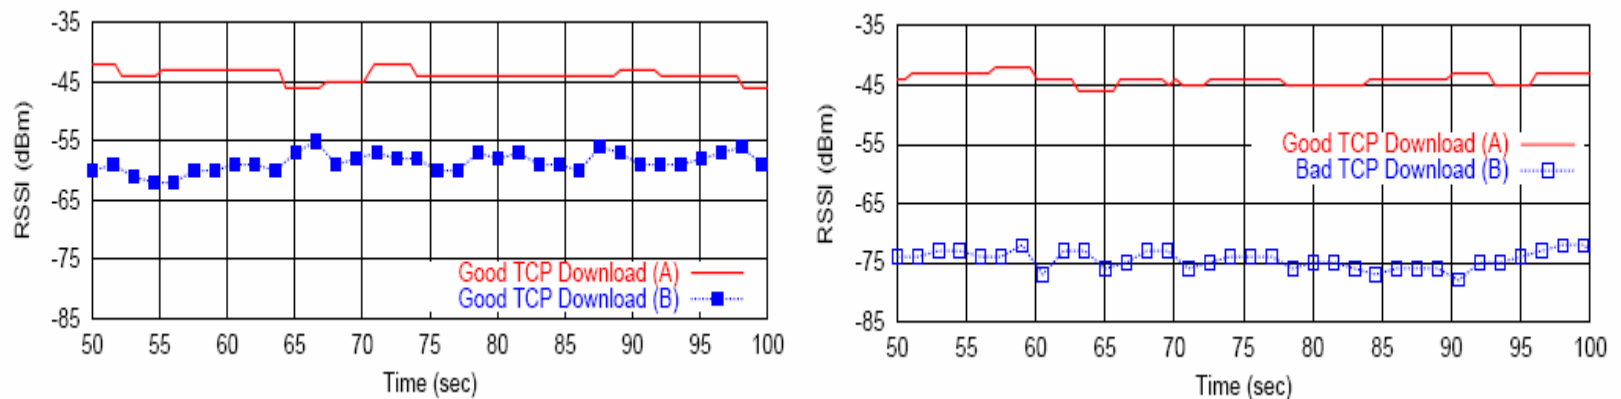


Fig 4 Wireless Received Signal Strength Indicator Comparison

TCP Download Channel Capacities

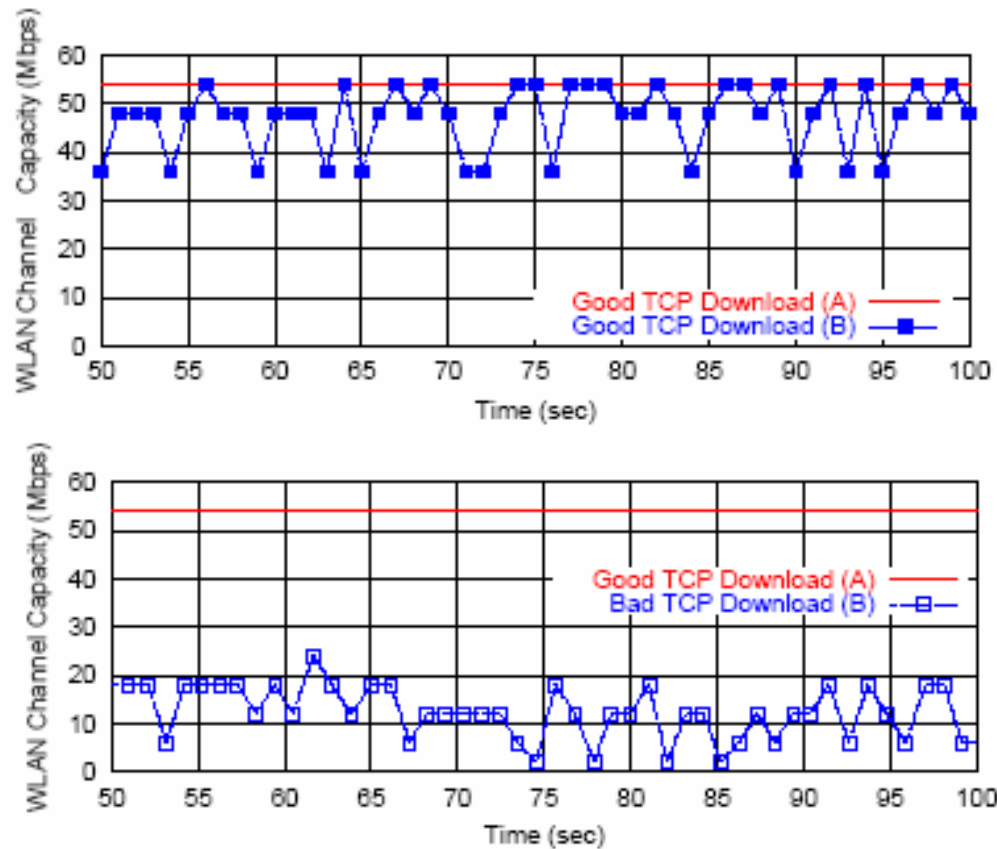


Figure 5: Channel Capacity Impacted by Location



Bad UDP Stream

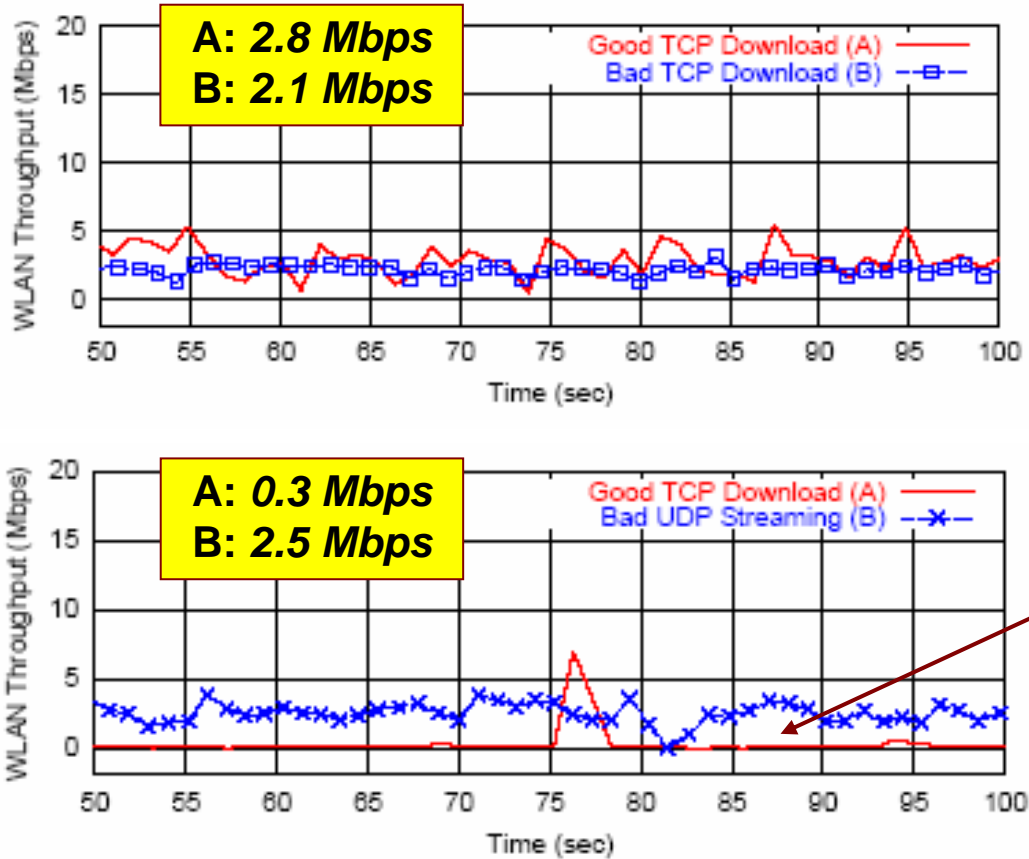


Figure 6: Throughput Impacted by Location and Application

Frame Retries and Packet Loss

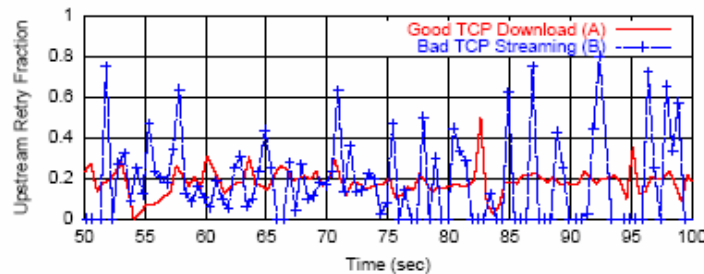
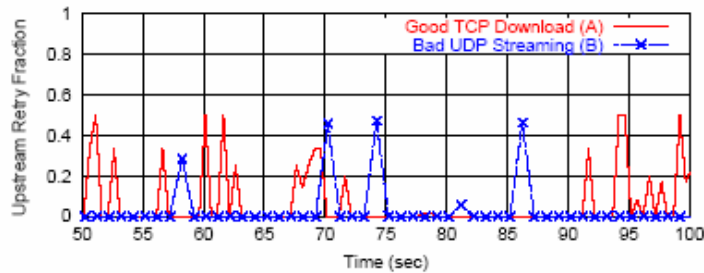
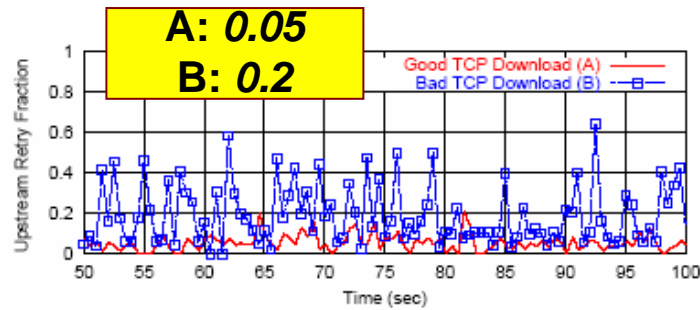


Figure 7: Wireless Layer Retry Fraction

AP queue causes high packet loss





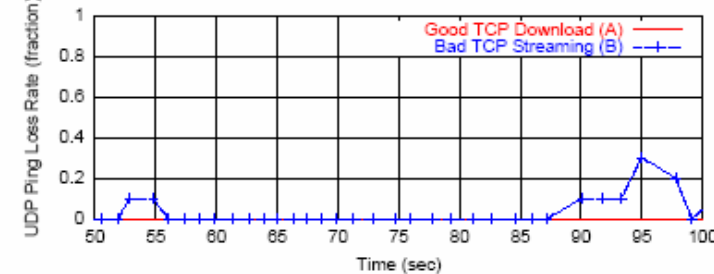



Figure 8: UDP Ping Loss Fraction

Round Trip Times

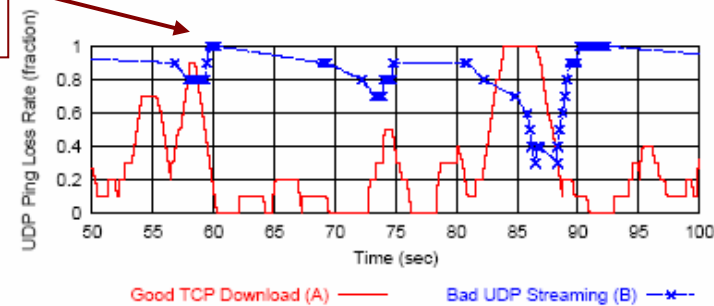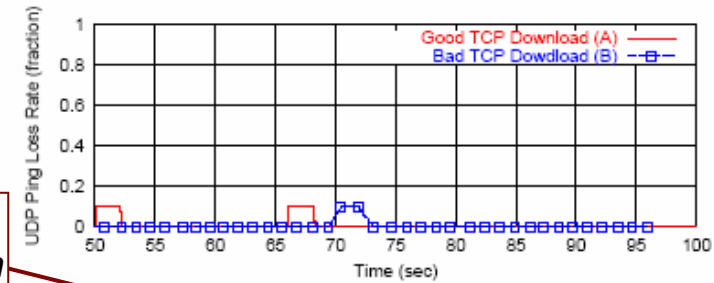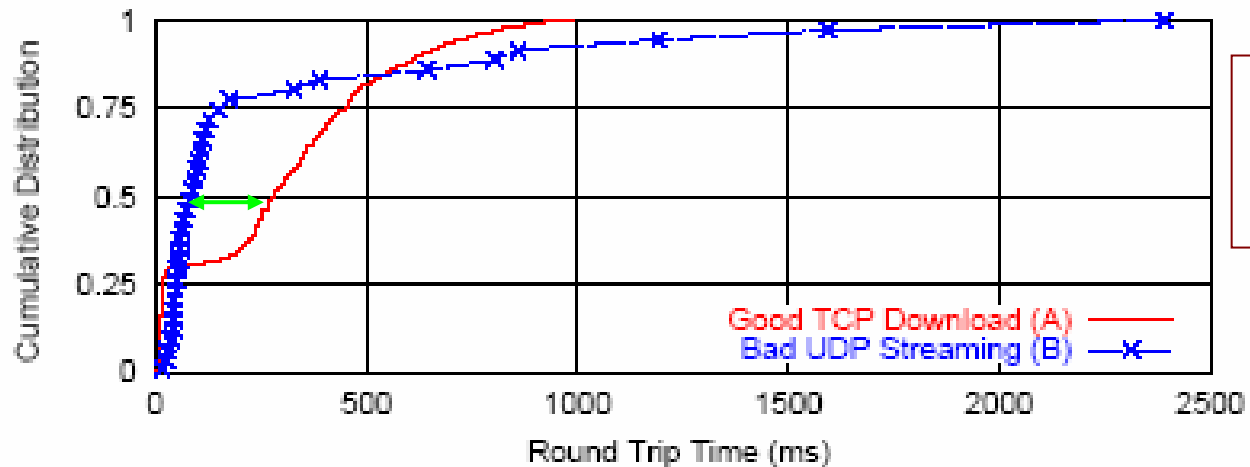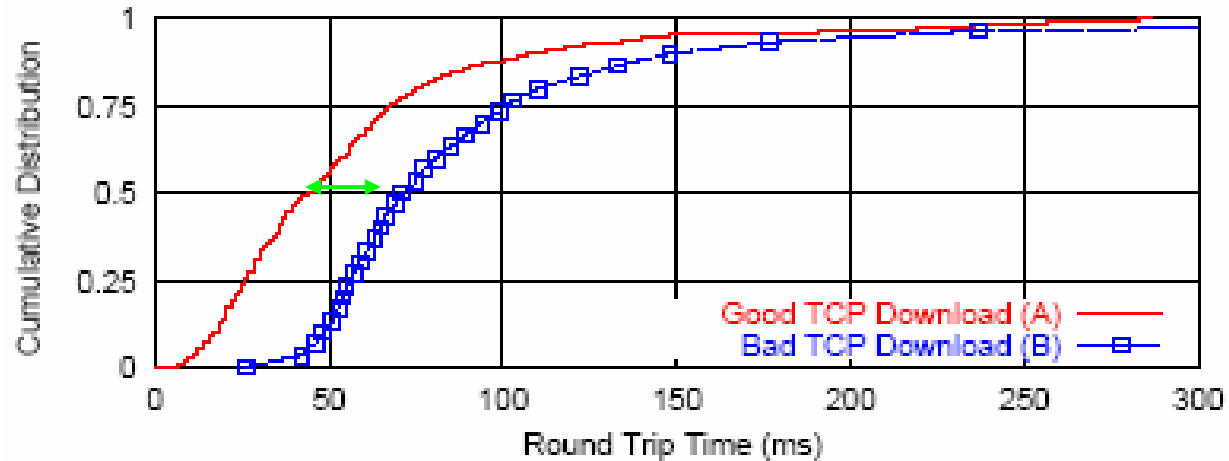


*large UDP
RTT's*



Round Trip Times

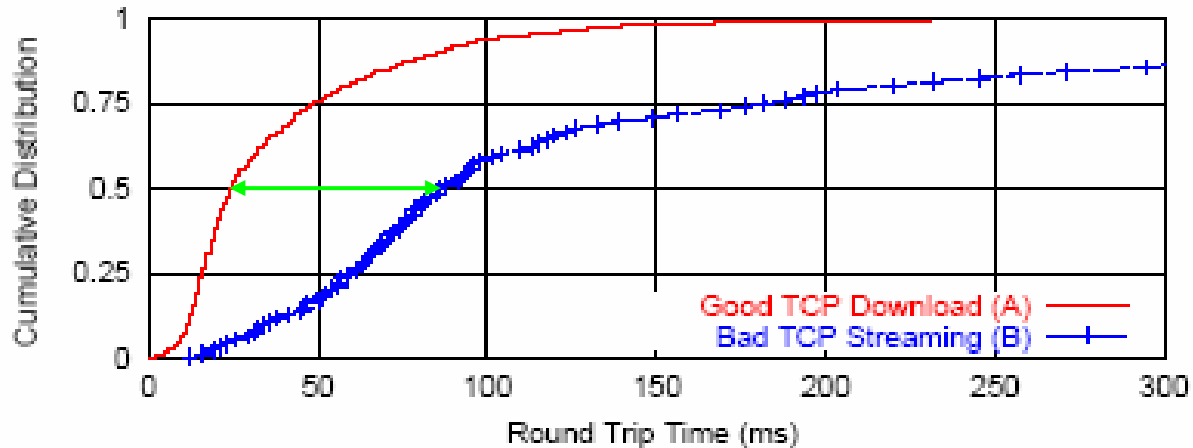


TCP does not fill the AP Queue.

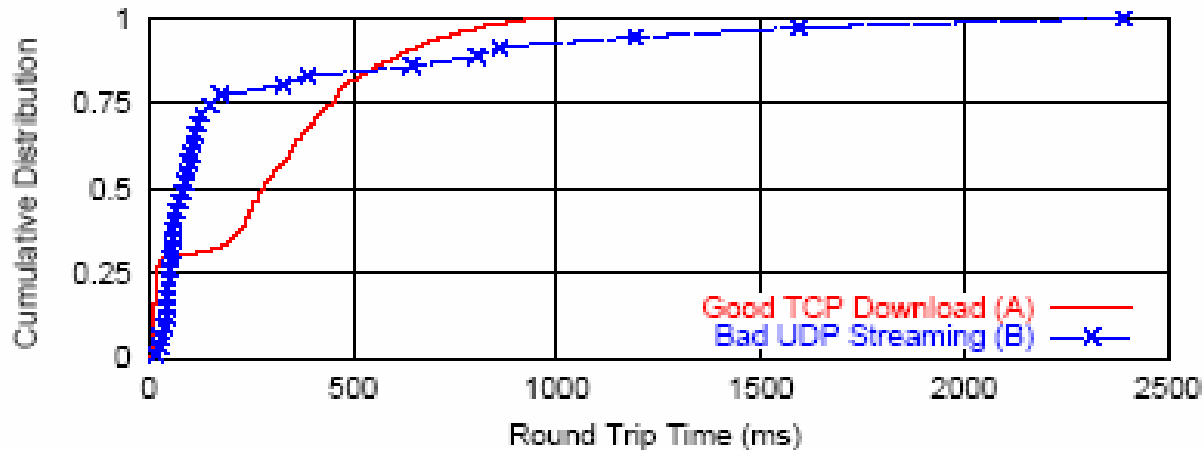


Good Streaming

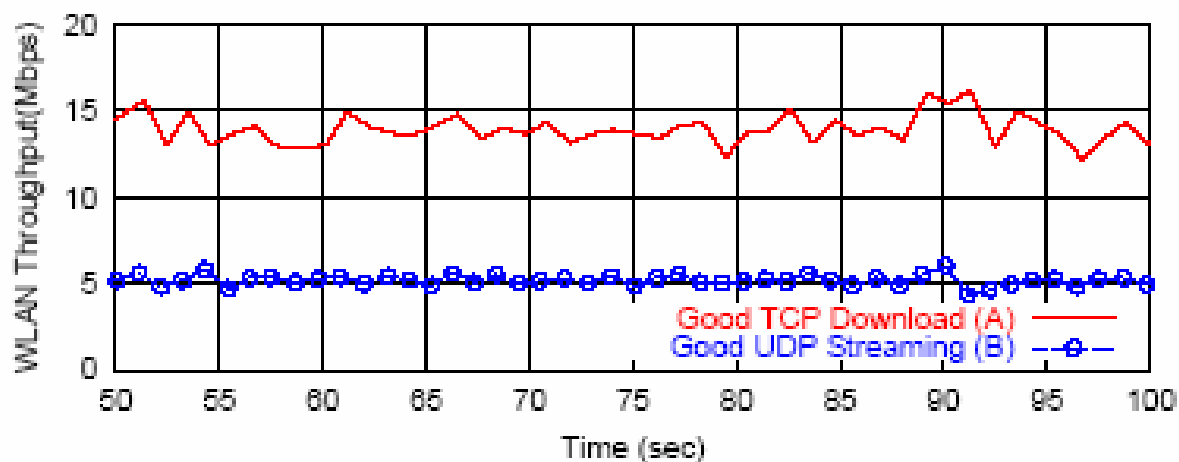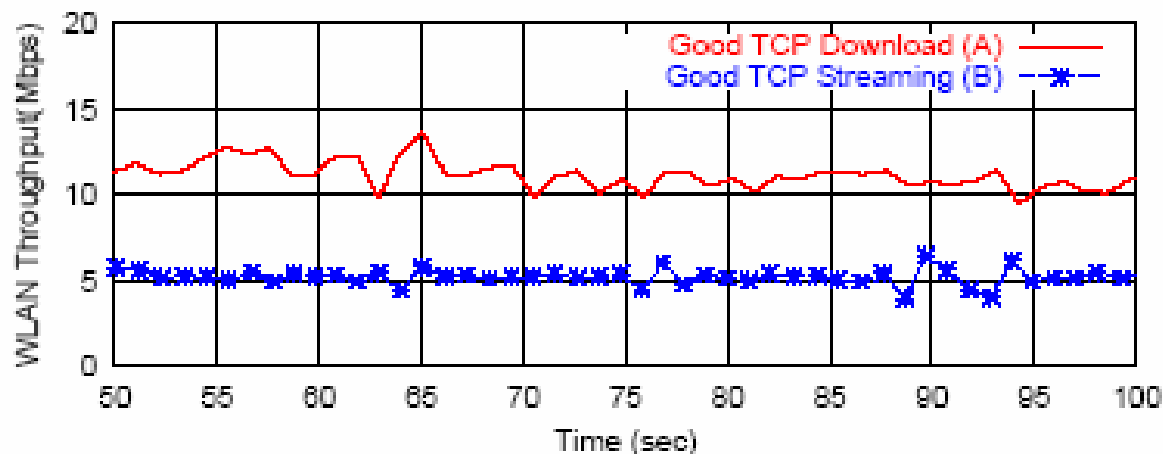



Bad Streaming

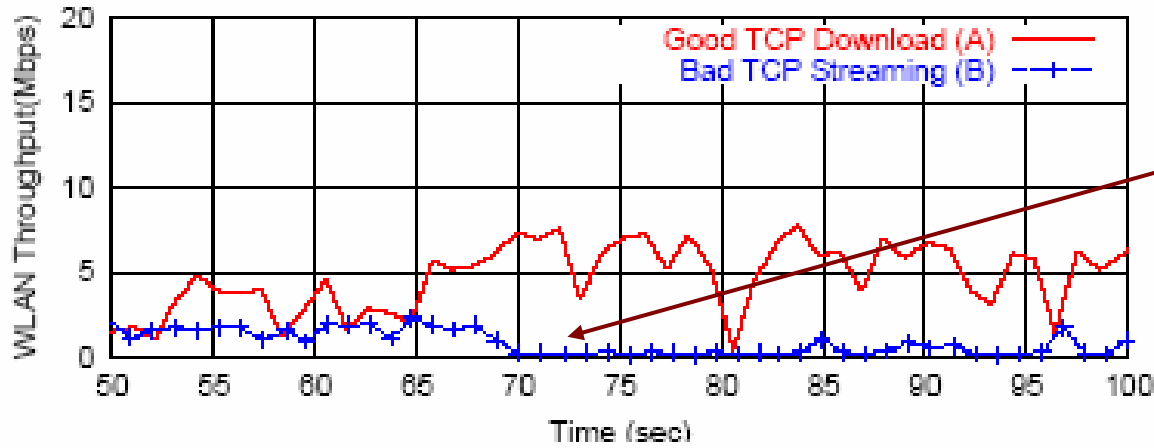

*TCP streaming
adjusts to bad location*

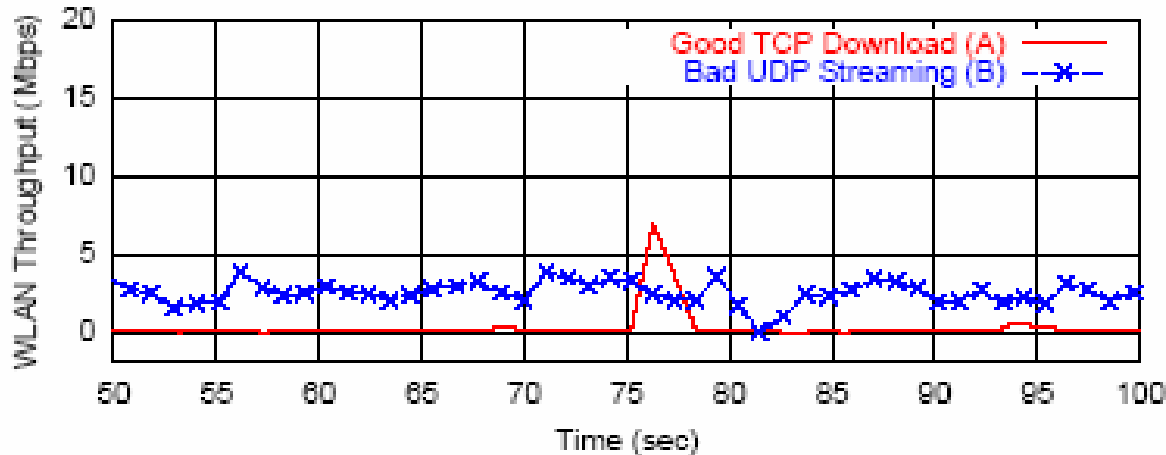

Single Bad Streams

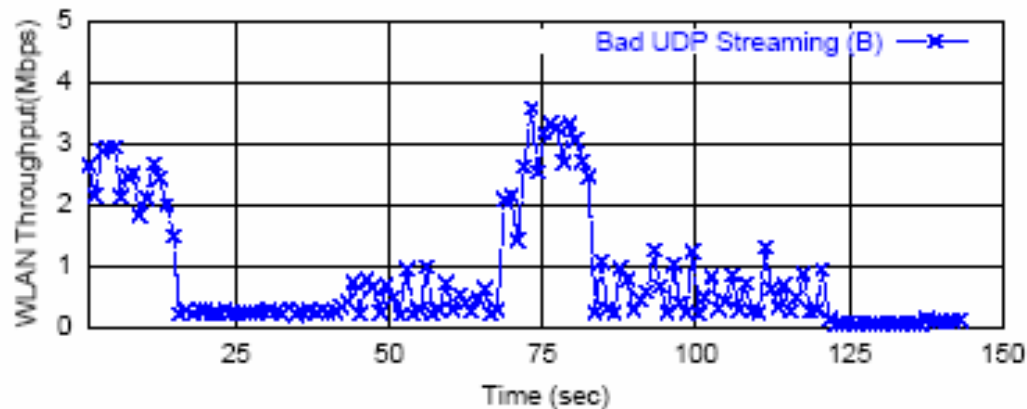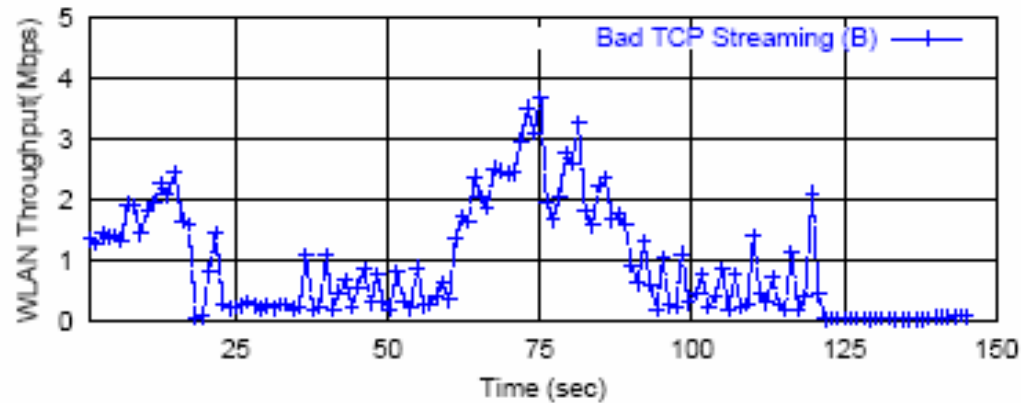

Conclusions and Future Work

- Application behavior impacts WLAN performance of concurrent applications.
- The choice of Transport Protocol impacts performance over a WLAN.
- Just modeling the data link channel misses intertwined effects of the AP network layer queuing.
- We need to get ‘inside’ the AP to understand the queuing in **both** the upstream and downstream direction.
- Is there a way for streaming application to get “hints” about the wireless data link layer?

Thank You!

**Performance Analysis of the
Intertwined Effects between Network
Layers for 802.11g Transmissions**

**Jon Gretarsson, Feng Li, Mingzhe Li, Ashish Samant,
Huahui Wu, Mark Claypool and Robert Kinicki
WPI Computer Science Department
Worcester, Massachusetts 01609**

rek@cs.wpi.edu

***Wireless Multimedia Networking and
Performance Modeling (WMuNeP)
Montreal, Canada, October 2005***

